


DIMMER COMPATIBILITY LINE R7S + PIN G9 + PIN G4 + PIN GY6.35

BASIC INFORMATION:

1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:

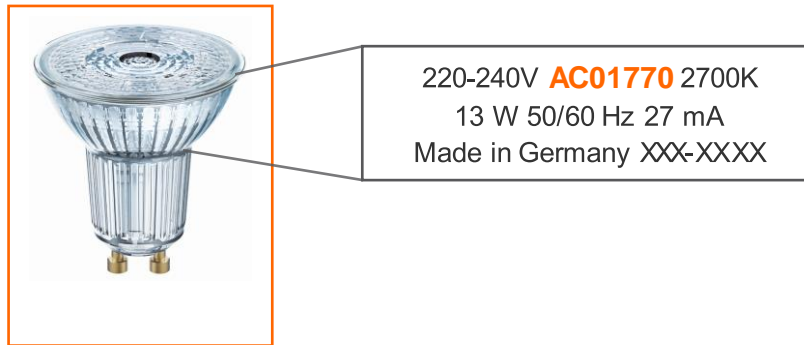

2. HOW CAN I READ THE FOLLOWING CHARTS?

Legend:
Information about the dimmability of the lamps. Green means very good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend					SUPERSTAR PAR16 35 36*				SUPERSTAR PAR16 50 36*				SUPERSTAR PAR16 80 36*				SUPERSTAR PAR16 80 120*			
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																				
Undesired dimmability																				
Not relevant																				
Not tested																				
EAN/Basic Code					4052839330153AC0184				4052839330171AC0187				4052839330218AB41305				405807503658WAC03043			
EAN/Basic Code					4052839330157AC0182				4052839330195AC0184				4052839330232AB41306				405807503632WAC03051			
Dimmer					Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range		
ABB	STD 50-3	230V50Hz	60-500	L	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 15%	2-20	97% - 12%	2-20	98% - 16%		
Altenburger Electronic	50 30	230V50Hz	15-350	T	1-10	98% - 15%	2-10	97% - 1%	1-4	96% - 1%	1-4	96% - 1%	1-10	98% - 27%	1-20	98% - 26%	1-20	97% - 27%		
ALPORA	DSP 400	230V50Hz	400	L	1-15	98% - 1%	1-10	97% - 5%	1-6	94% - 7%	1-6	94% - 7%	2-20	98% - 1%	2-9	98% - 1%	1-6	97% - 9%		
Berker	2861	230V50Hz	50-420	U	3-19	99% - 19%	2-12	97% - 19%	1-8	95% - 22%	1-8	95% - 22%	2-20	99% - 15%	2-20	98% - 17%	2-20	98% - 21%		
Blicino	LNN1441IN	230V50Hz			1-10	96% - 22%	1-10	97% - 26%	1-10	97% - 26%	1-10	97% - 26%	1-10	98% - 1%	2-14	98% - 16%	1-9	97% - 15%		
Blicino	LNN14408	230V50Hz			1-13	98% - 34%	1-10	97% - 35%	1-5	97% - 15%	1-5	97% - 15%	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%		
Blicino	NT4402N	230V50Hz	500	R	2-13	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%	1-20	98% - 1%	1-10	98% - 1%	1-6	97% - 9%		
Busch-Jaeger	6513 U-102	230V50Hz	40-420	T	1-11	98% - 1%	1-10	98% - 1%	1-5	99% - 7%	1-5	99% - 7%	1-10	98% - 1%	1-10	97% - 4%	1-10	97% - 19%		
Busch-Jaeger	6523 U-102	230V50Hz	420	T	1-10	98% - 1%	1-10	98% - 1%	1-4	97% - 1%	1-4	97% - 1%	1-10	98% - 6%	1-20	98% - 7%	1-20	97% - 10%		
Busch-Jaeger	2250 U	230V50Hz	60-600	L	1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%	2-20	98% - 1%	1-20	98% - 7%	1-20	97% - 10%		
Busch-Jaeger	6526 U	230V50Hz			1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%	2-20	98% - 1%	1-20	98% - 7%	1-20	97% - 10%		
Busch-Jaeger	2247 U-500	230V50Hz			1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%	1-10	98% - 1%	1-10	97% - 19%	1-10	97% - 19%		
CENTURY CONTROL	MULTI DIMMER	230V50Hz	60-600	L																
DINUY	RE EL1LE1	230V50Hz	400	LED																
ELKO	400GLI	230V50Hz																		
ELKO	315GLE	230V50Hz	20-315	T																
ELKO	600GLI	230V50Hz	40-600	U																
ELKO	420GLEI	230V50Hz	40-420	U																

Information about the OSRAM lamp type

Assessment of the results into categories. Includes the number of lamps and the related dimming range

DIMMER KOMPATIBILITÄT LINE R7S + PIN G9 + PIN G4 + PIN GY6.35

BASISINFORMATIONEN:

1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.



220-240V **AC01770** 2700K
 13 W 50/60 Hz 27 mA
 Made in Germany XXX-XXXX

2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine sehr gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes dimmverhalten auftreten kann etc.









Liste der getesteten Dimmer

Legend					SUPERSTAR PAR16 35 36*				SUPERSTAR PAR16 50 36*				SUPERSTAR PAR16 80 36*				SUPERSTAR PAR16 80 120*			
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																				
Undesired dimmability																				
Not relevant																				
Not tested																				
EAN/Basic Code					4052839330133AC01184				4052839330171AC01187				4052839330210AB41505				4058075036888AC03049			
EAN/Basic Code					4052839330157AC01182				4052839330195AC01184				4052839330223AB41506				4058075036888AC03051			
Dimmer					Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range	
Brand	Model	Voltage range	Power	Type	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
ABB	STD 50-3	230V50Hz	60-500	L	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
Altenburger Electronic	50 30	230V50Hz	15-350	T	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
AURORA	DSF 400	230V50Hz	400	L	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
Berker	2861	230V50Hz	50-420	U	1-20	98% - 27%	1-20	98% - 26%	1-20	97% - 27%	1-20	97% - 27%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
Bicimo	LNINT441N	230V50Hz			1-15	98% - 1%	1-10	97% - 5%	1-6	94% - 7%	1-6	94% - 7%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
Bicimo	LNINT4408	230V50Hz			2-20	98% - 1%	2-9	98% - 1%	1-6	97% - 5%	1-6	97% - 5%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
Bicimo	NT4402N	230V50Hz	500	R	3-19	98% - 1%	2-12	97% - 1%	1-8	95% - 22%	1-8	95% - 22%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
Busch-Jaeger	6513 U-102	230V50Hz	40-420	T	2-20	98% - 15%	2-20	98% - 17%	2-20	98% - 21%	2-20	98% - 21%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
Busch-Jaeger	6523 U-102	230V50Hz	420	T	1-10	96% - 22%	1-10	97% - 26%	1-10	97% - 26%	1-10	97% - 26%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
Busch-Jaeger	2250 U	230V50Hz	60-600	L	1-10	96% - 22%	2-14	98% - 16%	1-9	97% - 15%	1-9	97% - 15%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
Busch-Jaeger	6526 U	230V50Hz			1-13	98% - 34%	1-10	97% - 35%	1-5	97% - 15%	1-5	97% - 15%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
Busch-Jaeger	2247 U-500	230V50Hz			1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
CENTURY CONTROL	MULTI DIMMER	230V50Hz	60-600	L	2-13	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
DINJY	RE EL1LE1	230V50Hz	400	LED	1-11	98% - 1%	1-10	98% - 1%	1-5	98% - 7%	1-5	98% - 7%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
ELKO	400GLI	230V50Hz			1-10	98% - 1%	1-10	98% - 1%	1-4	97% - 1%	1-4	97% - 1%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
ELKO	315GLE	230V50Hz	20-315	T	2-20	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
ELKO	600GLI	230V50Hz	40-600	U	1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%
ELKO	420GLEI	230V50Hz	40-420	U	1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%	1-20	98% - 16%	2-20	98% - 16%	1-4	96% - 1%	1-4	96% - 1%

Angaben zum OSRAM Lampentyp









Bewertung der Testergebnisse in Ampel Kategorien. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich

DIMMER COMPATIBILITY LINE R7S + PIN G9 + PIN G4 + PIN GY6.35

Legend					PARATHOM DIM LINE 78		PARATHOM DIM LINE 78		PARATHOM DIM LINE118		PARATHOM DIM LINE118		PARATHOM DIM PIN G9		PARATHOM DIM PIN G9		PARATHOM DIM PIN G4		LED PIN DIM GY6.35	
Very good dimmability with indicated number of lamps (dimming range greater than 75%)					75		100		125		150		32		40		20			
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																				
Undesired dimmability					EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code	
Not tested					4058075811874 / AC11919		4058075169050 / AC11780		4058075811850 / AC11924		4058075271999 / AC18433		4058075811553 / AC02801		4058075271791 / AC17654		4058075271746 / AC17652		4058075432185 / AC24750	
Dimmer					Dimming range 1 Lamp		Dimming range 4 Lamps		Dimming range 1 Lamp		Dimming range 4 Lamps		Dimming range 1 Lamp		Dimming range 4 Lamps		Dimming range 1 Lamp		Dimming range 4 Lamps	
Brand	Model	Voltage range	Power	Type	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps
ABB	STD 50-3	230/50Hz	60-500	L	16-96%	18-98%	90-10%	92-24%	26-100%	29-100%	99-10%	99-9%	90-1%	100-0%	99-2%	99-2%	100-0%	100-0%	67-0%	99-0%
Altenburger	50,3	230/50Hz			31-99%						99-14%	98-4%	100-14%	98-38%	91-2%	98-0%		100-0%	99-6%	99-23%
AURORA	DSP 400	230/50Hz	400	L	0-97%	0-97%					99-0%	99-0%			96-0%	99-0%	100-0%	60-0%		
Berker	2861	230/50Hz	50-420	U	31-98%	29-98%	88-31%	95-31%	40-100%	43-100%	99-18%	99-11%		100-9%	99-0%	99-2%	75-0%	100-9%	99-0%	99-10%
Bticino	L/N/NT4411N	230/50Hz			6-98%	8-98%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%		100-0%	95-0%	100-0%
Bticino	L/N/NT4408	230/50Hz			0-97%	0-97%							100-4%	91-4%						
bticino	NT4402N	230/50Hz	500	R							98-3%	99-0%	100-5%	100-5%			98-3%		74-0%	98-32%
Busch-Jaeger	6513 U-102	230/50Hz	420	T	16-99%	9-99%	95-25%	95-21%	27-99%	21-99%	99-19%	99-9%	100-0%	100-0%	98-25%	98-15%		100-21%	99-44%	99-25%
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	23-99%	25-99%	83-26%	85-28%	9-100%	44-100%	98-5%	100-2%	72-1%	93-1%		76-0%	100-0%	100-0%	100-0%	99-0%
Busch-Jaeger	2250 U	230/50Hz	60-600	L	13-98%	13-98%		94-17%	15-100%	17-100%		99-0%			54-0%	80-16%	100-0%	100-0%	83-0%	99-0%
Busch-Jaeger	6526 U	230/50Hz			34-99%	33-98%	84-30%	85-30%	42-100%	44-100%	99-5%	98-3%	100-19%	100-16%	99-0%	98-0%	100-0%		99-0%	99-5%
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	6-96%	9-97%	91-8%	92-11%	4-100%	6-100%	99-1%	99-0%	90-6%	99-6%		94-0%	99-1%	100-0%	92-0%	99-0%
DimMax	420 SL	230/50Hz	200	L/T							99-0%	100-0%			99-0%	98-0%	89-0%	100-0%	99-0%	99-4%
DINUY	RE EL1 LE1	230/50Hz	400	LED	41-97%	40-97%	95-3%	100-3%	0-100%	3-100%	99-0%	99-0%	100-7%	100-18%	94-0%	94-0%	99-0%	100-0%	99-0%	99-0%
ELKO	400GLI	230/50Hz			0-99%	0-99%			0-100%	0-100%	99-0%	99-0%				86-0%	51-0%	87-0%	61-0%	
ELKO	315GLE	230/50Hz	20-315	T	28-98%	10-98%	92-25%	92-24%	34-99%	32-100%	99-0%	99-0%		100-13%	70-1%	80-0%		100-0%	99-0%	100-13%
ELKO	600GLE/l	230/50Hz			0-98%	0-98%	85-2%	87-4%	0-100%	0-100%	99-14%	99-7%	95-2%	99-2%		83-1%	78-0%	100-16%		
ELKO	600GLI	230/50Hz	40-600	U	14-98%	14-98%	86-17%	88-22%	16-100%	23-100%	99-0%	98-0%	98-15%	99-15%	84-0%	99-0%		100-0%	99-0%	99-0%
ELKO	420GLE/l	230/50Hz	40-420	U	5-98%	6-98%	84-3%	85-5%	4-100%	3-100%	99-0%	99-0%	99-6%	99-6%	75-0%	95-0%	67-0%	100-0%		99-10%
ELKO	1000LRI	230/50Hz			0-97%	0-97%	98-0%	98-0%	0-100%	0-100%	100-0%	99-0%	94-9%	94-9%	98-0%	98-0%	100-0%	100-0%	99-0%	99-0%
ELKO	630GLE	230/50Hz	20-630	U	13-99%	11-98%	92-14%	92-13%	17-100%	14-100%	99-14%	99-7%	100-2%	100-4%		83-1%	78-0%	100-16%		
Eltako	EUD61NPN-UC	230/50Hz	5-400	R/L/C	2-97%	3-97%			0-100%	0-100%	99-0%	99-0%	100-2%	100-12%	99-0%	98-0%	99-0%	100-0%		
Feller	40200.LEDxxx	230/50Hz			27-98%	7-98%	90-23%	90-23%	32-100%	29-100%	99-1%	100-0%	100-19%	100-9%		90-0%			99-0%	99-0%
Feller	40600 RLC	230/50Hz	20-600	U	0-98%	0-98%	85-2%	87-4%	0-100%	0-100%	99-1%	100-0%	95-2%	99-2%		90-0%			99-0%	99-0%
Feller	40600.RC	230/50Hz			13-99%	11-98%	92-14%	92-13%	17-100%	14-100%	99-18%	99-11%	100-2%	100-4%	99-0%	99-2%	75-0%	100-9%	98-0%	98-0%
Feller	40600.RL	230/50Hz			14-98%	14-98%	86-17%	88-22%	16-100%	23-100%	99-0%	98-0%	98-15%	99-15%	84-0%	99-0%		100-0%	99-0%	99-0%
Feller	40420.RLC	230/50Hz			5-98%	6-98%	84-3%	85-5%	4-100%	3-100%	99-0%	99-0%	99-6%	99-6%	75-0%	95-0%	67-0%	100-0%		99-10%
Feller	31000	230/50Hz			0-97%	0-97%	98-0%	98-0%	0-100%	0-100%	100-0%	100-0%	94-9%	94-9%	97-0%	98-0%	100-0%			
Gira	226200	230/50Hz			0-98%						99-0%	99-0%		100-1%		82-1%		100-0%	85-0%	99-0%
Gira	030700	230/50Hz	20-525	T	16-99%	19-99%	92-22%	92-23%	26-98%	28-100%	99-16%	99-7%	100-2%	100-2%	100-10%	98-1%		100-0%	99-9%	100-24%









*G4 and GY6.35 versions tested with HTM 70 transformer

DIMMER COMPATIBILITY LINE R7S + PIN G9 + PIN G4 + PIN GY6.35

Legend					PARATHOM DIM LINE 78		PARATHOM DIM LINE 78		PARATHOM DIM LINE118		PARATHOM DIM LINE118		PARATHOM DIM PIN G9		PARATHOM DIM PIN G9		PARATHOM DIM PIN G4		LED PIN DIM GY6.35	
Very good dimmability with indicated number of lamps (dimming range greater than 75%)					75		100		125		150		32		40		20			
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																				
Undesired dimmability					EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code	
Not tested					4058075811874 / AC11919		4058075169050 / AC11780		4058075811850 / AC11924		4058075271999 / AC18433		4058075811553 / AC02801		4058075271791 / AC17654		4058075271746 / AC17652		4058075432185 / AC24750	
Brand	Model	Voltage range	Power	Type	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
Gira	117600	230/50Hz	50-420	U	31-98%	33-98%	89-31%	95-29%	44-100%	41-100%	99-19%	99-12%	100-19%	100-11%	99-4%	99-2%		100-31%	99-0%	99-16%
Gira	238500	230/50Hz			0-100%	0-98%	94-13%	94-13%	13-100%	10-100%	100-8%	99-0%	100-20%	100-8%	99-0%	99-0%		100-0%	100-0%	99-0%
Gira	217400	230/50Hz	4X20-250	KNX-U	16-97%	14-97%	98-19%	98-16%	23-100%	19-100%	100-1%	98-0%	100-4%	100-6%	98-1%	99-0%		100-1%	100-0%	100-0%
Hager	WUD87	230/50Hz	400	LED-U	19-99%	19-99%	89-20%	94-18%	27-100%	22-100%	100-1%	99-0%	100-13%	100-13%	81-0%	99-1%		73-0%	100-14%	99-0%
Hamilton	KP1X40	230/50Hz	400									98-42%		92-9%				100-0%		
Hugo Müller	paladin 872110 led	230/50Hz			41-97%	40-97%	95-3%	100-3%	0-100%	3-100%	99-42%	99-41%	100-7%	100-18%		98-34%		99-42%	100-0%	
Jung	225 NVDE	230/50Hz	20-500	L	0-98%						99-0%	99-0%				82-1%		100-0%	85-0%	99-0%
Jung	225 TDE	230/50Hz			16-99%	19-99%	92-22%	92-23%	26-98%	28-100%	99-16%	99-7%	100-2%	100-2%	100-10%	98-1%		100-0%	99-9%	100-24%
Jung	254 UDIE1	230/50Hz			31-98%	33-98%	89-31%	95-29%	44-100%	41-100%	99-9%	100-3%	100-19%	100-11%	99-0%	98-0%		100-0%	99-0%	99-0%
Jung	1224 LEDUDE	230/50Hz		LED	0-100%	0-98%	94-13%	94-13%	13-100%	10-100%	100-8%	99-0%	100-20%	100-8%	99-0%	99-0%		100-0%	100-0%	99-0%
Jung	3904 REGHE	230/50Hz			16-97%	14-97%	98-19%	98-16%	23-100%	19-100%	100-0%	99-0%	100-4%	100-6%	98-12%	98-0%		100-0%	100-13%	
Legrand	665114	230/50Hz	400	U	6-98%	8-98%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%		100-0%	95-0%	100-0%
Legrand	574319/574339	230/50Hz	400	U	6-98%	8-98%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%		100-0%	95-0%	100-0%
Legrand	572239/572739	230/50Hz	400	U	6-98%	8-98%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%		100-0%	95-0%	100-0%
Legrand	078407/079207	230/50Hz	400	U	6-98%	8-98%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%		100-0%	95-0%	100-0%
Legrand	048869/048871	230/50Hz	400	U	6-98%	8-98%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%		100-0%	95-0%	100-0%
Legrand	067083/048869	230/50Hz			6-98%	8-98%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%		100-0%	95-0%	100-0%
Legrand	770061	230/50Hz	400	RL		12-98%	90-12%	92-14%	19-100%	20-100%			98-1%	99-5%				59-0%		
Legrand	099314	230/50Hz	300	RL	0-99%	0-99%	90-11%	91-11%			99-0%	98-0%	99-14%	99-3%	99-0%	98-0%		100-0%		
Legrand	770062	230/50Hz	400	RLC	0-97%	0-97%	95-14%	95-14%	17-99%	17-99%	99-3%	99-0%	100-1%	99-9%	99-0%	98-0%		100-0%		
Legrand	078405	230/50Hz	600	RL	0-97%	0-97%					99-1%	99-0%	100-4%	91-4%		94-0%		99-1%	100-0%	92-0%
Legrand	066721	230/50Hz	3-75	L																99-0%
Legrand	752162	230/50Hz	5-60W	T																99-0%
MASTER	DM-DGL	230/50Hz	1000	U / LED	2-97%	2-97%	99-42%	100-42%			99-40%	99-39%	100-4%	100-12%	91-39%	91-0%		99-40%		77-0%
MASTER	DM-2500	230/50Hz	2500	U / LED	2-97%	2-97%	99-0%	100-0%	0-100%	0-100%	99-0%	99-0%	100-8%	100-14%	94-0%	94-0%		99-0%	100-0%	
Merten	MEG5136-0000	230/50Hz			28-98%	10-98%	92-25%	92-24%	34-99%	32-100%	99-0%	99-0%		100-13%	70-1%	80-0%		100-0%	99-0%	100-13%
Merten	MEG5134-0000	230/50Hz			27-98%	7-98%	90-23%	90-23%	32-100%	29-100%	99-9%	100-3%	100-19%	100-9%	99-0%	98-0%		100-0%	99-0%	99-0%
Merten	MEG5139-0000	230/50Hz			0-98%	0-98%	85-2%	87-4%	0-100%	0-100%	99-14%	99-7%	95-2%	99-2%		83-1%		78-0%	100-16%	
Merten	MEG5137-0000	230/50Hz			13-99%	11-98%	92-14%	92-13%	17-100%	14-100%	99-18%	99-11%	100-2%	100-4%	99-0%	99-2%		75-0%	100-9%	98-0%
Merten	MEG5133-0000	230/50Hz			14-98%	14-98%	86-17%	88-22%	16-100%	23-100%	99-0%	98-0%	98-15%	99-15%	84-0%	99-0%		100-0%	99-0%	99-0%
Merten	MEG5138-0000	230/50Hz			5-98%	6-98%	84-3%	85-5%	4-100%	3-100%	99-0%	99-0%	99-6%	99-6%	75-0%	95-0%		67-0%	100-0%	99-10%
Merten	MEG 5170-0300	230/50Hz	10-200	U	0-84%	0-75%			32-100%	30-100%	76-23%		100-9%	100-12%	69-8%	99-0%		97-0%	100-0%	100-37%
Merten	MEG 5131	230/50Hz	40-400	L	0-98%	0-98%	86-0%	87-0%	0-100%	0-100%	99-0%	99-0%	95-5%	100-5%	81-0%	98-0%		100-0%	99-0%	100-0%
Merten	MEG 5132	230/50Hz			0-98%	0-98%	86-0%	87-0%	0-100%	0-100%	99-0%	99-0%	95-5%	100-5%	81-0%	98-0%		100-0%	99-0%	100-0%
Merten	MEG 5140	230/50Hz	9-100	L	0-97%	0-98%	58-0%	84-0%	0-100%	0-100%	99-0%	98-0%	91-6%	98-6%		78-0%		96-0%		57-0%
Merten	MEG 5135	230/50Hz	60-1000	L	0-97%	0-97%	98-0%	98-0%	0-100%	0-100%	100-0%	99-0%	94-9%	94-9%	98-0%	98-0%		100-0%	100-0%	
MK	K4501	230/50Hz	180	L	11-96%	11-96%	83-15%	84-15%	18-100%	19-100%	98-0%	99-0%	100-7%	92-18%		99-0%		98-0%	100-0%	99-0%

*G4 and GY6.35 versions tested with HTM 70 transformer

DIMMER COMPATIBILITY LINE R7S + PIN G9 + PIN G4 + PIN GY6.35

Legend					PARATHOM DIM LINE 78	PARATHOM DIM LINE 78	PARATHOM DIM LINE118	PARATHOM DIM LINE118	PARATHOM DIM PIN G9	PARATHOM DIM PIN G9	PARATHOM DIM PIN G4	LED PIN DIM GY6.35				
					75	100	125	150	32	40	20					
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																
Undesired dimmability																
Not tested																
					EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code				
					4058075811874 / AC11919	4058075169050 / AC11780	4058075811850 / AC11924	4058075271999 / AC18433	4058075811553 / AC02801	4058075271791 / AC17654	4058075271746 / AC17652	4058075432185 / AC24750				
Dimmer					75		100		32		40		20		LED PIN DIM GY6.35	
Brand	Model	Voltage range	Power	Type	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
NEXUS	881P-01	230/50Hz	400	L	0-97%				0-100%	0-100%		99-9%			99-0%	100-0%
NIKO	310-01900	230/50Hz	5-200	U	6-97%	6-97%	97-6%	100-6%	6-100%	6-100%	99-0%	100-0%	100-4%	100-8%	100-0%	99-0%
NIKO	330-00700	230/50Hz	5-200	U	9-97%	9-97%	98-11%	100-11%	14-100%	14-100%	99-0%	100-0%	100-5%	100-5%	99-0%	99-0%
Odace	S520512	230/50Hz			27-98%	7-98%	90-23%	90-23%	32-100%	29-100%	99-1%	100-0%	100-19%	100-9%		99-0%
Odace	S520511	230/50Hz			14-98%	14-98%	86-17%	88-22%	16-100%	23-100%	99-0%	98-0%	98-15%	99-15%	84-0%	99-0%
Odace	S520515	230/50Hz			5-98%	6-98%	84-3%	85-5%	4-100%	3-100%	99-0%	99-0%	99-6%	99-6%	75-0%	95-0%
Odace	S520518	230/50Hz			0-97%	0-98%	58-0%	84-0%	0-100%	0-100%	99-0%	98-0%	91-6%	98-6%	78-0%	96-0%
Osram	HTI DALI 315 DIM	230/50Hz	20-315	DALI-T	12-98%		97-17%	92-16%	17-99%	16-100%	100-4%	99-0%	94-4%	100-2%	99-0%	99-0%
PEHA	435 HAN	230/50Hz	60-600	L	0-98%	18-98%	66-12%	84-24%	26-100%	29-100%	99-2%	98-0%		95-26%	51-0%	98-0%
Schneider	400GLI	230/50Hz	40-400	T	0-99%	0-99%			0-100%	0-100%	99-0%	99-0%		86-0%	51-0%	87-0%
Schneider	SBD315RC	230/50Hz			28-98%	10-98%	92-25%	92-24%	34-99%	32-100%	99-0%	99-0%		100-13%	70-1%	80-0%
Schneider	SBD200LED	230/50Hz	400		27-98%	7-98%	90-23%	90-23%	32-100%	29-100%	99-1%	100-0%	100-19%	100-9%		99-0%
Schneider	SBD600RCL	230/50Hz			0-98%	0-98%	85-2%	87-4%	0-100%	0-100%	99-14%	99-7%	95-2%	99-2%	83-1%	78-0%
Schneider	SBD630RC	230/50Hz			13-99%	11-98%	92-14%	92-13%	17-100%	14-100%	99-18%	99-11%	100-2%	100-4%	99-0%	99-2%
Schneider	SBD600RL	230/50Hz			14-98%	14-98%	86-17%	88-22%	16-100%	23-100%	99-0%	98-0%	98-15%	99-15%	84-0%	99-0%
Schneider	SBD420RCL	230/50Hz			5-98%	6-98%	84-3%	85-5%	4-100%	3-100%	99-0%	99-0%	99-6%	99-6%	75-0%	95-0%
Schneider	5170	230/50Hz			0-84%	0-75%			32-100%	30-100%	76-23%		100-9%	100-12%	69-8%	99-0%
Schneider	SBD400RL	230/50Hz			0-98%	0-98%	86-0%	87-0%	0-100%	0-100%	99-0%	99-0%	95-5%	100-5%	81-0%	98-0%
Schneider	SBDSP1	230/50Hz			0-97%	0-98%	58-0%	84-0%	0-100%	0-100%	99-0%	98-0%	91-6%	98-6%	78-0%	96-0%
Schneider	ATTD1000RL	230/50Hz			0-97%	0-97%	98-0%	98-0%	0-100%	0-100%	100-0%	99-0%	94-9%	94-9%	98-0%	98-0%
Shuttle	SDIM-T-LED-500W	230/50Hz	2-500	T & LED-T	3-98%	4-97%	97-14%	97-14%	14-100%	14-100%	99-2%	100-0%	100-9%	100-9%	100-0%	98-0%
Siemens	5TC8 284	230/50Hz	20-525	T			93-16%	89-11%			99-13%	99-2%	90-1%	64-1%	66-11%	89-1%
Siemens	5WVG1-527-1AB31	230/50Hz	20-500	KNX-U	0-97%	0-97%	95-29%	95-22%	0-100%	16-100%	100-1%	98-0%	100-2%	100-6%	98-1%	99-0%
VADSBO	LD 220	230/50Hz	1-200	U	0-98%	0-97%	100-3%	100-3%	4-100%	0-100%	100-0%	99-0%	100-26%	100-26%	98-0%	98-0%
VARIILIGHT	HQ3W	230/50Hz	400		6-97%	6-95%	94-9%	94-9%	12-100%	9-100%	99-1%	99-0%	87-9%	100-18%	98-0%	86-0%
VARIILIGHT	JQP401W	230/50Hz	400	T	3-97%	3-95%	77-4%	94-12%	6-100%	8-100%		99-0%	100-30%	98-17%		100-0%
Vimar	20135	230/50Hz	3-100	U	6-97%	3-97%	91-9%	93-9%	9-100%	9-100%	99-0%	100-0%	100-2%	100-14%	100-0%	99-0%
ZANO	WH401	230/50Hz	400	L	0-97%	0-95%	78-0%	94-0%	0-100%	0-100%		99-0%			88-0%	97-0%
ZANO	WH251	230/50Hz	250		0-97%	0-95%	76-0%	94-0%	0-100%	0-100%		99-0%			100-0%	100-0%
ZANO	Z GRID 700	230/50Hz	250	LED					0-100%	0-100%			93-21%	91-21%		63-0%
ZANO	Z GRID 500	230/50Hz	500						0-100%	0-100%		99-0%	71-6%	99-6%	96-0%	89-0%

*G4 and GY6.35 versions tested with HTM 70 transformer

Please Note:

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. OSRAM does not take over any responsibility, warranty or liability that this results can also achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonics or electronic resonance).
- Subject to change without notice
- Errors and omission excepted
- Always make sure to use the most recent release

Application Notes:

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

Bitte beachten:

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. OSRAM übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

Anwendungshinweis:

- Um bestmögliche Dimmergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.

LEDVANCE GmbH

Head Office:

Parkring 29-33
85748 Garching, Germany
Phone +49 89 780673-100
Fax +49 89 780673-XXX
www.ledvance.com