


## DIMMER COMPATIBILITY PAR20 + PAR30 + PAR 38

### BASIC INFORMATION:

#### 1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:

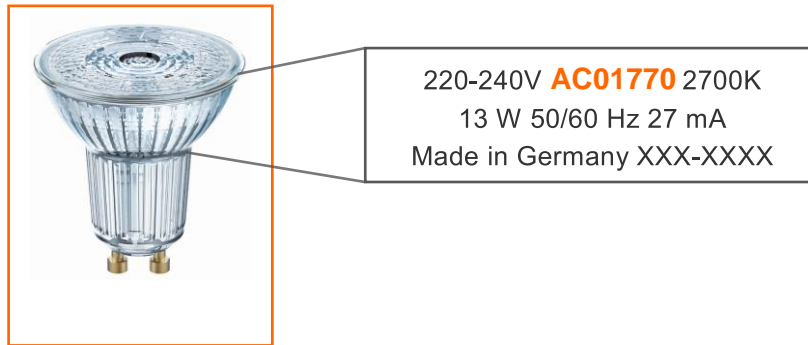

#### 2. HOW CAN I READ THE FOLLOWING CHARTS?

Legend:  
Information about the dimmability of the lamps. Green means very good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend					SUPERSTAR PAR16 35 36*				SUPERSTAR PAR16 50 36*				SUPERSTAR PAR16 80 36*				SUPERSTAR PAR16 80 120*			
Very good dimmability with indicated number of lamps (dimming range greater than 75%)					Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range	
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)					1-10		98% - 15%		1-13		98% - 20%		1-8		97% - 23%		1-8		97% - 23%	
Undesired dimmability					1-10		98% - 15%		1-10		97% - 12%		1-4		98% - 16%		2-20		98% - 16%	
Not relevant					1-10		98% - 15%		1-10		97% - 12%		1-4		96% - 1%		1-4		96% - 1%	
Not tested					1-10		98% - 27%		1-10		98% - 26%		1-20		97% - 27%		1-20		97% - 27%	
					1-15		98% - 1%		1-10		97% - 5%		1-6		94% - 7%		1-6		94% - 7%	
					2-20		98% - 1%		2-9		98% - 1%		1-6		97% - 9%		1-6		97% - 9%	
					3-19		99% - 19%		2-12		97% - 19%		1-8		95% - 22%		1-8		95% - 22%	
					2-20		99% - 15%		2-20		98% - 17%		2-20		98% - 21%		2-20		98% - 21%	
					1-10		96% - 22%		1-10		97% - 26%		1-10		97% - 15%		1-9		97% - 15%	
					1-10		98% - 34%		1-10		97% - 35%		1-5		97% - 15%		1-5		97% - 15%	
					1-20		98% - 15%		1-13		98% - 20%		1-8		97% - 23%		1-8		97% - 23%	
					2-13		98% - 1%		1-10		98% - 5%		1-6		97% - 9%		1-6		97% - 9%	
					1-11		98% - 1%		1-10		99% - 1%		1-5		99% - 7%		1-5		99% - 7%	
					1-10		98% - 1%		1-10		98% - 1%		1-4		97% - 1%		1-4		97% - 1%	
					2-20		98% - 6%		1-20		98% - 7%		1-20		97% - 10%		1-20		97% - 10%	
					1-20		98% - 1%		1-13		97% - 1%		1-8		96% - 1%		1-8		96% - 1%	
					1-14		98% - 1%		1-13		97% - 4%		1-10		97% - 19%		1-10		97% - 19%	

Information about the OSRAM lamp type

Assessment of the results into categories. Includes the number of lamps and the related dimming range

# DIMMER KOMPATIBILITÄT PAR20 + PAR30 + PAR 38

## BASISINFORMATIONEN:

### 1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.



220-240V **AC01770** 2700K  
 13 W 50/60 Hz 27 mA  
 Made in Germany XXX-XXXX

### 2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine sehr gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschte dimmverhalten auftreten kann etc.




Liste der getesteten Dimmer

Legend					SUPERSTAR PAR16 35 36*							
Very good dimmability with indicated number of lamps (dimming range greater than 75%)												
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)												
Undesired dimmability												
Not relevant												
Not tested												
Dimmer					Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range
Brand	Model	Voltage range	Power	Type								
ABB	STD 50-3	230V50Hz	60-500	L	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%
Altenburger Electronic	50 30	230V50Hz	15-350	T	2-20	98% - 15%	2-20	97% - 12%	2-20	98% - 16%	2-20	98% - 16%
AURORA	DSP 400	230V50Hz	400	L	1-10	98% - 15%	2-10	97% - 14%	1-4	96% - 1%	1-4	96% - 1%
Berker	2861	230V50Hz	50-420	U	1-20	98% - 27%	1-20	98% - 26%	1-20	97% - 27%	1-20	97% - 27%
Berker	LANIT 441N	230V50Hz			1-15	98% - 1%	1-10	97% - 5%	1-6	94% - 7%	1-6	94% - 7%
Bicimo	LANIT 4408	230V50Hz			2-20	98% - 1%	2-9	98% - 1%	1-6	97% - 3%	1-6	97% - 3%
Bicimo	NT 4402N	230V50Hz	500	R	3-18	99% - 19%	2-12	97% - 19%	1-8	95% - 22%	1-8	95% - 22%
Busch-Jaeger	6513 U-102	230V50Hz	40-420	T	2-20	98% - 15%	2-20	98% - 17%	2-20	98% - 21%	2-20	98% - 21%
Busch-Jaeger	6523 U-102	230V50Hz	420	T	1-10	96% - 22%	1-10	97% - 26%				
Busch-Jaeger	2250 U	230V50Hz	60-600	L	1-10		2-14	98% - 16%	1-9	97% - 15%	1-9	97% - 15%
Busch-Jaeger	6526 U	230V50Hz			1-13	98% - 34%	1-10	97% - 35%	1-5		1-5	
Busch-Jaeger	2247 U-500	230V50Hz			1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%
CENTURY CONTROL	MULTI DIMMER	230V50Hz	60-600	L	2-13	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%
DINJY	RE EL1LE1	230V50Hz	400	LED	1-11	98% - 1%	1-10	98% - 1%	1-5	99% - 7%	1-5	99% - 7%
ELKO	400GLI	230V50Hz			1-10		1-10		1-4	97% - 1%	1-4	97% - 1%
ELKO	316GLE	230V50Hz	20-315	T	2-20	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%
ELKO	600GLI	230V50Hz	40-600	U	1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%
ELKO	420GLEI	230V50Hz	40-420	U	1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%




Angaben zum OSRAM Lampentyp

Bewertung der Testergebnisse in Ampel Kategorien. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich




**DIMMER COMPATIBILITY PAR20 + PAR30 + PAR 38**

Legend				SUPERSTAR PAR20 50 36°		PARATHOM DIM PAR30 75 36°		PARATHOM DIM PAR38 100 30°			
Very good dimmability with indicated number of lamps (dimming range greater than 75%)											
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)				EAN / Basic Code		EAN / Basic Code		EAN / Basic Code			
Undesired dimmability				4058075813212 / AC08775 4058075184497 / AC08775		4058075105430 / AC08776 4058075184510 / AC08776		4058075105478 / AC08778 4058075184558 / AC08778			
Not tested				Dimming range 1 Lamp		Dimming range 4 Lamps		Dimming range 1 Lamp		Dimming range 4 Lamps	
Brand	Model	Power	Type	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps		
Clipsal	E30 (32V500M)	500VA	L	100% - 0%	100% - 0%	99% - 0%	100% - 0%	100% - 0%	100% - 0%		
TCL-Legrand	V8051-M	40-630W	L	100% - 0%	100% - 8%	100% - 11%	100% - 12%	100% - 11%	100% - 12%		
Panasonic	WEG57813	40-300W	L	88% - 0%	90% - 0%	99% - 0%	99% - 0%	96% - 0%	96% - 0%		
LUMEX	LOADSMART	500VA	L	95% - 5%	93% - 0%	100% - 6%	100% - 6%	97% - 5%	97% - 5%		
Schneider-Clipsal	KB31RD400	400W	L	100% - 0%	100% - 9%	99% - 13%	99% - 13%	100% - 12%	100% - 13%		
Clipsal	32E450UDM	450W	T	99% - 20%	100% - 20%	99% - 24%	99% - 23%	99% - 22%	99% - 22%		
HPM	CAT400T HPM	400W	T	90% - 9%	90% - 10%	100% - 13%	100% - 12%	96% - 11%	96% - 11%		
Anam / Legrand	ASW3000H	1000W	T	68% - 14%	94% - 30%	99% - 37%	99% - 39%	98% - 39%	97% - 41%		
Trader	Dimpala	400W	U	94% - 0%	95% - 0%	100% - 0%	99% - 0%	98% - 0%	98% - 0%		
Clipsal	32ELEDM	400W	LED	98% - 6%	98% - 6%	99% - 9%	99% - 8%	98% - 7%	98% - 7%		
Siemens	SUH8622-3NC01	25-400W	L	93% - 9%	100% - 23%	99% - 27%	99% - 28%	99% - 28%	99% - 29%		
Schneider-Electric	C460	400W	L	100% - 12%	100% - 14%	100% - 18%	100% - 18%	100% - 18%	100% - 18%		
Schneider-Electric	U201DST600	40-600VA	L	95% - 19%	87% - 0%	99% - 4%	97% - 0%	96% - 0%	94% - 0%		
Clipsal	32E450LM	450W	L	100% - 0%	100% - 0%	99% - 0%	99% - 0%	99% - 0%	99% - 0%		
Honyar	KT250	15-250W	L	99% - 0%	100% - 0%	99% - 12%	99% - 13%	99% - 11%	99% - 12%		
Schneider-Electric	40600 RL	40-600W	L	93% - 20%	94% - 27%	100% - 32%	99% - 33%	97% - 33%	97% - 34%		
Step	E033	45-300W	L	90% - 0%	100% - 0%	100% - 0%	100% - 0%	100% - 0%	100% - 0%		
Bticino	SAM5350	40-300W	L	100% - 0%	100% - 0%	100% - 0%	100% - 0%	100% - 0%	100% - 0%		
Lutron	GXI-3104-T-CE-WH	2300W	T	96% - 0%	96% - 0%	100% - 9%	100% - 8%	98% - 8%	98% - 7%		
HPM	CAT400L	400W	L	82% - 12%	82% - 11%	97% - 15%	97% - 16%	94% - 16%	94% - 16%		
Panasonic	WMS549	40-400W	L	95% - 0%	100% - 9%	99% - 12%	99% - 14%	99% - 12%	99% - 13%		
SAL	SDA450	450W	T	100% - 18%	99% - 13%	99% - 17%	99% - 15%	99% - 15%	98% - 14%		
Siemens	SUH8122-3NC01	25-400W	L	90% - 8%	100% - 23%	99% - 27%	99% - 29%	99% - 28%	99% - 30%		
Schneider-Clipsal	E8431EPD4	25-350W	L	92% - 0%	91% - 0%	100% - 6%	100% - 0%	97% - 5%	96% - 0%		
MK branded	K1541 WHI	75-500W	T	63% - 0%	83% - 0%	96% - 10%	96% - 13%	94% - 10%	94% - 12%		
Veto	VT-500	60-500W	T	57% - 0%	94% - 0%	100% - 10%	99% - 11%	97% - 4%	97% - 10%		
Shuttle	SDIM-T-LED 500W	500W	T	100% - 11%	100% - 0%	99% - 13%	99% - 11%	99% - 11%	99% - 10%		
Shuttle	SDIMR-T-LED 500W	500W	T	100% - 13%	99% - 10%	99% - 14%	99% - 13%	99% - 13%	98% - 12%		
Shuttle	SDIM-T-LED 125W	125W	T	100% - 8%	100% - 0%	99% - 10%	99% - 10%	99% - 9%	98% - 8%		
DIGINET(GERARD)	MMDM/PB	400W	Push Button	95% - 0%	96% - 0%	100% - 5%	99% - 5%	98% - 0%	98% - 0%		
Legrand	617030	600W	L	100% - 0%	100% - 0%	100% - 0%	100% - 0%	100% - 0%	100% - 0%		
Panasonic	WEG 57912	40-200W	L	100% - 0%	100% - 0%	99% - 0%	99% - 0%	99% - 0%	99% - 0%		
SR SANJOON	SRD-1000	1000W	L	100% - 16%	100% - 22%	99% - 26%	99% - 28%	99% - 28%	99% - 29%		
JIN HEUNG ELECTRIC	JH-922473	1000W	L	100% - 12%	100% - 15%	99% - 20%	99% - 22%	100% - 21%	100% - 22%		
Dynalite	DMC810GL	12 channels 10A	L	98% - 0%	99% - 0%	97% - 0%	98% - 0%	96% - 0%	97% - 0%		




## DIMMER COMPATIBILITY PAR20 + PAR30 + PAR 38

Legend					PARATHOM DIM PAR20 50 36°	PARATHOM DIM PAR30 75 36°	PARATHOM DIM PAR38 100 30°			
Very good dimmability with indicated number of lamps (dimming range greater than 75%)								EAN/ Basic Code	EAN/ Basic Code	EAN/ Basic Code
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)										
Undesired dimmability										
Not tested					4058075184497 / AC08775	4058075184510 / AC08776	4058075184558 / AC08778			
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
Brand	Model	Voltage range	Power	Type						
ABB	STD 50-3	230/50Hz	60-500	L		94-23%	100-29%	100-32%	100-29%	100-31%
Altenburger	50,3	230/50Hz			100-30%	100-13%	100-19%	100-13%	100-16%	100-12%
AURORA	DSP 400	230/50Hz	400	R		100-14%	100-0%	100-4%	100-0%	100-6%
Berker	2861	230/50Hz	50-420	U	100-29%	100-25%	100-0%	100-0%	100-11%	100-28%
Bticino	L/N/NT4411N	230/50Hz				91-4%	100-6%	100-5%	97-5%	97-5%
Bticino	I/NT4408HC/HD/HS44C	230/50Hz				100-0%	100-0%	100-0%	100-0%	100-0%
bticino	NT4402N	230/50Hz	500	R		90-15%	100-20%	100-20%	98-19%	98-19%
Busch-Jaeger	6513 U-102	230/50Hz	420	T	100-33%	100-17%	100-24%	100-18%	100-21%	100-17%
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T		97-24%	100-29%	100-30%	100-28%	100-29%
Busch-Jaeger	2250 U	230/50Hz	60-600	L		98-0%	100-12%	100-14%	100-15%	100-17%
Busch-Jaeger	6526 U	230/50Hz				98-26%	100-30%	100-30%	100-32%	100-31%
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	100-5%	100-4%	100-8%	100-9%	100-7%	100-8%
DINUY	RE EL1 LE1	230/50Hz	400	LED	100-1%	100-1%	100-3%	100-3%	100-2%	100-2%
ELKO	400GLI	230/50Hz				99-0%	100-1%	100-1%	100-1%	100-0%
ELKO	315GLE	230/50Hz	20-315	T	100-24%	100-19%	100-24%	100-22%	100-23%	100-21%
ELKO	600GLE/I	230/50Hz				97-0%	98-0%	100-22%	100-15%	100-0%
ELKO	600GLI	230/50Hz	40-600	U	99-8%	100-18%	100-20%	100-22%	100-19%	100-21%
ELKO	420GLE/I	230/50Hz	40-420	U	99-3%	97-2%	100-4%	100-4%	100-3%	100-3%
ELKO	1000LRI	230/50Hz				100-0%	100-0%	100-0%	100-0%	100-0%
ELKO	630GLE	230/50Hz	20-630	U	100-14%	100-10%	100-17%	100-18%	100-12%	100-10%
Eltako	EUD61NPN-UC	230/50Hz	5-400	R / L / C	97-0%	97-0%	100-2%	100-2%	100-1%	100-1%
Feller	40200.LEDxxx	230/50Hz			100-21%	100-18%	100-13%	100-12%	100-21%	100-20%
Feller	40600 RLC	230/50Hz	20-600	U	97-0%	98-0%	100-22%	100-15%	100-0%	100-0%
Feller	40600.RC	230/50Hz			100-14%	100-10%	100-17%	100-18%	100-12%	100-10%
Feller	40600.RL	230/50Hz			99-8%	100-18%	100-20%	100-22%	100-19%	100-21%
Feller	40420.RLC	230/50Hz			99-3%	97-2%	100-4%	100-4%	100-3%	100-3%
Feller	31000	230/50Hz			100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
GIRA	226200	230/50Hz			100-6%	100-4%	100-7%	100-8%	100-7%	100-8%
Gira	030700	230/50Hz	20-525	T	100-22%	100-17%	100-22%	100-19%	100-20%	100-18%
Gira	117600	230/50Hz	50-420	U	100-29%	100-25%	100-0%	100-0%	100-29%	100-27%
Gira	238500	230/50Hz			100-8%	100-6%	100-9%	100-9%	100-10%	100-8%

## DIMMER COMPATIBILITY PAR20 + PAR30 + PAR 38

Legend					PARATHOM DIM PAR20 50 36°	PARATHOM DIM PAR30 75 36°	PARATHOM DIM PAR38 100 30°			
Very good dimmability with indicated number of lamps (dimming range greater than 75%)								EAN / Basic Code		
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)										
Undesired dimmability										
Not tested					4058075184497 / AC08775	4058075184510 / AC08776	4058075184558 / AC08778			
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
Brand	Model	Voltage range	Power	Type						
Gira	217400	230/50Hz	4X20-250	KNX-U	100-0%	100-13%	100-18%	100-13%	100-15%	100-13%
Hager	WUD87	230/50Hz	400	LED-U	100-0%	90-14%	100-18%	100-16%	100-17%	100-15%
Hamilton	KP1X40	230/50Hz	400		100-0%	100-18%	100-25%	100-26%	100-24%	100-26%
Hugo Müller	paladin 872110 led	230/50Hz			100-1%	100-1%	100-3%	100-3%	100-2%	100-2%
Jung	225 NVDE	230/50Hz	20-500	L	100-6%	100-4%	100-7%	100-8%	100-7%	100-8%
Jung	225 TDE	230/50Hz			100-22%	100-17%	100-22%	100-19%	100-20%	100-18%
Jung	254 UDIE1	230/50Hz			100-29%	100-25%	100-0%	100-0%	100-29%	100-27%
Jung	1224 LEDUDE	230/50Hz		LED	100-8%	100-6%	100-9%	100-9%	100-10%	100-8%
Jung	3904 REGHE	230/50Hz			100-0%	100-13%	100-18%	100-13%	100-15%	100-13%
Legrand	665114	230/50Hz	400	U	100-0%	91-4%	100-6%	100-5%	97-5%	97-5%
Legrand	067083=048869=048	230/50Hz			100-0%	91-4%	100-6%	100-5%	97-5%	97-5%
Legrand	770061	230/50Hz	400	RL	90-7%	100-12%	100-0%	100-13%	100-11%	100-12%
Legrand	099314	230/50Hz	300	RL	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Legrand	770062	230/50Hz	400	RLC	100-2%	100-0%	100-0%	100-0%	100-0%	100-0%
Legrand	078405	230/50Hz	600	RL	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
MASTER	DM-DGL	230/50Hz	1000	U / LED	100-9%	100-0%	100-3%	100-1%	100-2%	100-1%
MASTER	DM-2500	230/50Hz	2500	U / LED	100-0%	100-0%	100-1%	100-0%	100-0%	100-0%
Merten	MEG5136-0000	230/50Hz			100-24%	100-19%	100-24%	100-22%	100-23%	100-21%
Merten	MEG5134-0000	230/50Hz			100-21%	100-18%	100-13%	100-12%	100-21%	100-20%
Merten	MEG5139-0000	230/50Hz			97-0%	98-0%	100-22%	100-15%	100-0%	100-0%
Merten	MEG5137-0000	230/50Hz			100-14%	100-10%	100-17%	100-18%	100-12%	100-10%
Merten	MEG5133-0000	230/50Hz			99-8%	100-18%	100-20%	100-22%	100-19%	100-21%
Merten	MEG5138-0000	230/50Hz			99-3%	97-2%	100-4%	100-4%	100-3%	100-3%
Merten	MEG 5170-0300	230/50Hz	10-200	U	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Merten	MEG 5131	230/50Hz	40-400	L	98-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Merten	MEG 5132	230/50Hz			98-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Merten	MEG 5140	230/50Hz	9-100	L	100-0%	95-0%	100-0%	100-0%	100-0%	100-0%
Merten	MEG 5135	230/50Hz	60-1000	L	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
MK	K4501	230/50Hz	180	L	100-0%	94-9%	100-13%	100-14%	100-12%	100-13%
NEXUS	881P-01	230/50Hz	400	L	95-0%	100-0%	100-0%	100-0%	100-0%	100-0%

## DIMMER COMPATIBILITY PAR20 + PAR30 + PAR 38

Legend					PARATHOM DIM PAR20 50 36°	PARATHOM DIM PAR30 75 36°	PARATHOM DIM PAR38 100 30°			
Very good dimmability with indicated number of lamps (dimming range greater than 75%)								EAN / Basic Code		
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)										
Undesired dimmability										
Not tested										
					4058075184497 / AC08775	4058075184510 / AC08776	4058075184558 / AC08778			
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
Brand	Model	Voltage range	Power	Type						
NIKO	310-0190001901	230/50Hz	5-200	U	100-0%	100-0%	100-1%	100-1%	100-1%	100-1%
NIKO	330-0070000701	230/50Hz	5-200	U	100-7%	100-6%	100-9%	100-9%	100-8%	100-8%
Odace	S520512	230/50Hz			100-21%	100-18%	100-13%	100-12%	100-21%	100-20%
Odace	S520511	230/50Hz			99-8%	100-18%	100-20%	100-22%	100-19%	100-21%
Odace	S520515	230/50Hz			99-3%	97-2%	100-4%	100-4%	100-3%	100-3%
Odace	S520518	230/50Hz				95-0%	100-0%	100-0%	100-0%	100-0%
Osram	HTi DALI 315 DIM	230/50Hz	20-315	DALI-T	100-12%	100-11%	100-15%	100-15%	100-14%	100-13%
PEHA	435 HAN	230/50Hz	60-600	L		96-18%	100-24%	100-26%	100-23%	100-25%
Schneider	400GLI	230/50Hz	40-400	T		99-0%	100-1%	100-1%	100-1%	100-0%
Schneider	SBD315RC	230/50Hz			100-24%	100-19%	100-24%	100-22%	100-23%	100-21%
Schneider	SBD200LED	230/50Hz	400		100-21%	100-18%	100-13%	100-12%	100-21%	100-20%
Schneider	SBD600RCRL	230/50Hz			97-0%	98-0%	100-22%	100-15%	100-0%	100-0%
Schneider	SBD630RC	230/50Hz			100-14%	100-10%	100-17%	100-18%	100-12%	100-10%
Schneider	SBD600RL	230/50Hz			99-8%	100-18%	100-20%	100-22%	100-19%	100-21%
Schneider	SBD420RCRL	230/50Hz			99-3%	97-2%	100-4%	100-4%	100-3%	100-3%
Schneider	5170	230/50Hz								
Schneider	SBD400RL	230/50Hz			98-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Schneider	SBD SPL	230/50Hz				95-0%	100-0%	100-0%	100-0%	100-0%
Schneider	ATTD1000RL	230/50Hz			100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Shuttle	SDIM-T-LED-500W	230/50Hz	2-500	T & LED-T	100-11%	100-9%	100-14%	100-12%	100-12%	100-11%
Siemens	STC8 284	230/50Hz	20-525	T	100-32%	99-9%	100-15%	100-9%	100-12%	100-8%
Siemens	5WG1-528-1AB31	230/50Hz	20-500	KNX-U	100-6%	100-0%	100-1%	100-0%	100-0%	100-0%
VADSBO	LD 220	230/50Hz	1-200	U	100-1%	100-1%	100-3%	100-3%	100-2%	100-2%
VARILIGHT	HQ3W	230/50Hz	400			91-22%	100-0%	100-0%	99-27%	99-27%
VARILIGHT	JQP401W	230/50Hz	400	T		100-6%	100-9%	100-11%	100-9%	100-11%
Vimar	20135	230/50Hz	3 - 100	U	100-6%	100-6%	100-0%	100-8%	100-7%	100-7%
ZANO	WH401	230/50Hz	400	L		91-0%	100-30%		98-25%	98-28%
ZANO	WH251	230/50Hz	250			100-0%	100-0%	100-0%	100-0%	100-0%
ZANO	Z GRID 700	230/50Hz	250	LED		92-0%	100-0%	100-0%	99-0%	99-0%
ZANO	Z GRID 500	230/50Hz	500			100-0%	100-0%	100-0%	100-0%	100-0%

**Please Note:**

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. OSRAM does not take over any responsibility, warranty or liability that this results can also achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonics or electronic resonance).
- Subject to change without notice
- Errors and omission excepted
- Always make sure to use the most recent release

**Application Notes:**

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

**Bitte beachten:**

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. OSRAM übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

**Anwendungshinweis:**

- Um bestmögliche Dimmergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.

LEDVANCE GmbH

Head Office:

Parkring 29-33  
85748 Garching, Germany  
Phone +49 89 780673-100  
Fax +49 89 780673-XXX  
www.ledvance.com