


DIMMER COMPATIBILITY PAR16

BASIC INFORMATION:

1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:

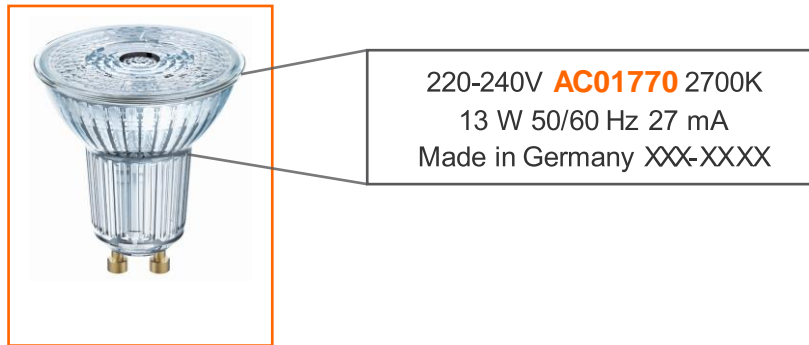

2. HOW CAN I READ THE FOLLOWING CHARTS?

Legend:
Information about the dimmability of the lamps. Green means very good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend					SUPERSTAR PAR16 35 36*				SUPERSTAR PAR16 50 36*				SUPERSTAR PAR16 80 36*				SUPERSTAR PAR16 80 120*			
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																				
Undesired dimmability																				
Not relevant																				
Not tested																				
EAN/Basic Code					405283330133AC0184				40528333017AC0187				405283330210AB41305				405807503658WAC03043			
EAN/Basic Code					405283330157AC0182				405283330195AC0184				405283330232AB41306				405807503632WAC03051			
Dimmer					Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range		
ABB	STD 50-3	230V50Hz	60-500	L	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 15%	2-20	97% - 12%	2-20	98% - 16%		
Altenburger Electronic	50_30	230V50Hz	15-350	T	1-10	98% - 15%	2-10	97% - 1%	1-4	96% - 1%	1-4	96% - 1%	1-10	98% - 27%	1-20	98% - 26%	1-20	97% - 27%		
ALPORA	DSP 400	230V50Hz	400	L	1-15	98% - 1%	1-10	97% - 5%	1-6	94% - 7%	1-6	94% - 7%	2-20	98% - 1%	2-9	98% - 1%	1-6	97% - 9%		
Berker	2861	230V50Hz	50-420	U	3-19	99% - 19%	2-12	97% - 19%	1-8	95% - 22%	1-8	95% - 22%	2-20	99% - 15%	2-20	98% - 17%	2-20	98% - 21%		
Blicino	LNN1441N	230V50Hz			1-10	96% - 22%	1-10	97% - 26%	1-10	98% - 16%	1-9	97% - 15%	1-10	96% - 22%	1-10	97% - 26%	1-10	97% - 26%		
Blicino	LNN14408	230V50Hz			1-10	98% - 34%	1-10	97% - 35%	1-5	97% - 15%	1-5	97% - 15%	1-10	98% - 15%	1-13	98% - 20%	1-8	97% - 23%		
Blicino	NT4402N	230V50Hz	500	R	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	2-13	98% - 1%	1-10	98% - 5%	1-6	97% - 9%		
Busch-Jaeger	6513 U-102	230V50Hz	40-420	T	1-11	98% - 1%	1-10	98% - 1%	1-5	99% - 7%	1-5	99% - 7%	1-11	98% - 1%	1-10	98% - 1%	1-10	98% - 1%		
Busch-Jaeger	6523 U-102	230V50Hz	420	T	1-10	98% - 1%	1-10	98% - 1%	1-4	97% - 1%	1-4	97% - 1%	1-10	98% - 1%	1-10	98% - 1%	1-10	98% - 1%		
Busch-Jaeger	6526 U	230V50Hz	60-600	L	1-10	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%	1-10	96% - 1%	1-13	97% - 1%	1-8	96% - 1%		
Busch-Jaeger	6526 U	230V50Hz	60-600	L	1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%	1-10	98% - 1%	1-13	97% - 1%	1-10	97% - 19%		
Busch-Jaeger	2247 U-500	230V50Hz	400	T	1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%	1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%		
CENTURY CONTROL	MULTI DIMMER	230V50Hz	60-600	L																
DINUY	RE EL1LE1	230V50Hz	400	LED																
ELKO	400GLI	230V50Hz																		
ELKO	315GLE	230V50Hz	20-315	T																
ELKO	600GLI	230V50Hz	40-600	U																
ELKO	420GLEI	230V50Hz	40-420	U																

Information about the OSRAM lamp type


Assessment of the results into categories. Includes the number of lamps and the related dimming range

DIMMER KOMPATIBILITÄT PAR16

BASISINFORMATIONEN:

1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.

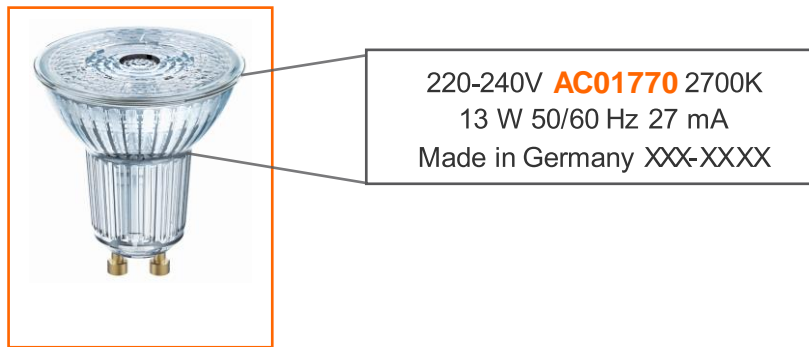

2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine sehr gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes dimmverhalten auftreten kann etc.











Liste der getesteten Dimmer

Legend					SUPERSTAR PAR16 35 36*				SUPERSTAR PAR16 50 36*				SUPERSTAR PAR16 60 36*				SUPERSTAR PAR16 80 120*					
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																						
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																						
Undesired dimmability																						
Not relevant																						
Not tested																						
Dimmer					EAN/Basic Code				EAN/Basic Code				EAN/Basic Code				EAN/Basic Code					
Brand	Model	Voltage range	Power	Type	405283330133AC0184	405283330157AC0182	405283330171AC0187	405283330195AC0184	405283330210AB41505	405283330223AB41506	405807503688AC03049	405807503682AC03051	405807503682AC03051	405807503682AC03051	405807503682AC03051	405807503682AC03051	405807503682AC03051	405807503682AC03051	405807503682AC03051			
					Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range		
					1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-8	97% - 23%	1-8	97% - 23%	1-8	97% - 23%	1-8	97% - 23%	1-8	97% - 23%
					2-20	98% - 15%	2-20	97% - 12%	2-20	98% - 16%	2-20	98% - 16%	2-20	98% - 16%	2-20	98% - 16%	2-20	98% - 16%	2-20	98% - 16%	2-20	98% - 16%
					1-10	98% - 15%	2-10	97% - 14%	1-4	96% - 1%	1-4	96% - 1%	1-4	96% - 1%	1-4	96% - 1%	1-4	96% - 1%	1-4	96% - 1%	1-4	96% - 1%
					1-20	98% - 27%	1-20	98% - 26%	1-20	97% - 27%	1-20	97% - 27%	1-20	97% - 27%	1-20	97% - 27%	1-20	97% - 27%	1-20	97% - 27%	1-20	97% - 27%
					1-15	98% - 1%	1-10	97% - 5%	1-6	94% - 7%	1-6	94% - 7%	1-6	94% - 7%	1-6	94% - 7%	1-6	94% - 7%	1-6	94% - 7%	1-6	94% - 7%
					2-20	98% - 1%	2-9	98% - 1%	1-6	97% - 9%	1-6	97% - 9%	1-6	97% - 9%	1-6	97% - 9%	1-6	97% - 9%	1-6	97% - 9%	1-6	97% - 9%
					3-19	99% - 19%	2-12	97% - 19%	1-8	95% - 22%	1-8	95% - 22%	1-8	95% - 22%	1-8	95% - 22%	1-8	95% - 22%	1-8	95% - 22%	1-8	95% - 22%
					2-20	98% - 15%	2-20	98% - 17%	2-20	98% - 21%	2-20	98% - 21%	2-20	98% - 21%	2-20	98% - 21%	2-20	98% - 21%	2-20	98% - 21%	2-20	98% - 21%
					1-10	96% - 22%	1-10	97% - 26%	1-10	97% - 26%	1-10	97% - 26%	1-10	97% - 26%	1-10	97% - 26%	1-10	97% - 26%	1-10	97% - 26%	1-10	97% - 26%
					1-10	96% - 22%	2-14	98% - 16%	1-9	97% - 15%	1-9	97% - 15%	1-9	97% - 15%	1-9	97% - 15%	1-9	97% - 15%	1-9	97% - 15%	1-9	97% - 15%
					1-13	98% - 34%	1-10	97% - 35%	1-5	95% - 1%	1-5	95% - 1%	1-5	95% - 1%	1-5	95% - 1%	1-5	95% - 1%	1-5	95% - 1%	1-5	95% - 1%
					1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-8	97% - 23%	1-8	97% - 23%	1-8	97% - 23%	1-8	97% - 23%	1-8	97% - 23%
					2-13	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%	1-6	97% - 9%	1-6	97% - 9%	1-6	97% - 9%	1-6	97% - 9%	1-6	97% - 9%
					1-11	98% - 1%	1-10	98% - 1%	1-5	98% - 7%	1-5	98% - 7%	1-5	98% - 7%	1-5	98% - 7%	1-5	98% - 7%	1-5	98% - 7%	1-5	98% - 7%
					1-10	98% - 1%	1-10	98% - 1%	1-4	97% - 1%	1-4	97% - 1%	1-4	97% - 1%	1-4	97% - 1%	1-4	97% - 1%	1-4	97% - 1%	1-4	97% - 1%
					2-20	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%	1-20	97% - 10%	1-20	97% - 10%	1-20	97% - 10%	1-20	97% - 10%	1-20	97% - 10%
					1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%	1-8	96% - 1%	1-8	96% - 1%	1-8	96% - 1%	1-8	96% - 1%	1-8	96% - 1%
					1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%	1-10	97% - 19%	1-10	97% - 19%	1-10	97% - 19%	1-10	97% - 19%	1-10	97% - 19%











Angaben zum OSRAM Lampentyp

Bewertung der Testergebnisse in Ampel Kategorien. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich

DIMMER KOMPATIBILITÄT PAR16

Legend					PARATHOM PRO PAR16 35 36°	PARATHOM PRO PAR16 50 36°	PARATHOM PRO PAR16 80 36°	PARATHOM DIM PAR16 35 36°	PARATHOM DIM PAR16 50 36°	PARATHOM DIM PAR16 50 36° E14	PARATHOM DIM PAR16 80 36°	PARATHOM DIM PAR16 80 60°	PARATHOM DIM PAR16 80 120°	PARATHOM DIM PAR16 100 36°								
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																						
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																						
Undesired dimmability																						
Not tested																						
					EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code								
					4058075260016 / AC24597 4058075259997 / AC16504 4058075259898 / AC16505	4058075448728 / AC24597 4058075448704 / AC24598 4058075448681 / AC24599	4058075449107 / AC24600 4058075449084 / AC24601 4058075449060 / AC24602	4058075259973 / AC16509 4058075259959 / AC16510 4058075259874 / AC16511	4058075260139 / AC16512 4058075260115 / AC16513 4058075260054 / AC16514	4058075448360 / AC24564	4058075449282 / AC24603 4058075449268 / AC24604 4058075449244 / AC24605	4058075449220 / AC24606 4058075449183 / AC24608 4058075449206 / AC24607	4058075449169 / AC24609 4058075449145 / AC24610 4058075449121 / AC24611	4058075449343 / AC24612 4058075449329 / AC24613 4058075449305 / AC24614								
Dimmer					Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range			
Brand	Model	Voltage range	Power	Type	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	Dimming range	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps		
Hugo Müller	paladin 872110 led	230/50Hz					92-0%	91-0%	92-0%	91-0%												
Jung	225 NVDE	230/50Hz	20-500	L	1-20	100-0%	91-0%	89-0%	91-0%	89-0%	1-20	100-0%	1-18	97-0%	86-0%	90-0%	90-0%	89-0%	90-0%	89-0%	91-0%	89-0%
Jung	225 TDE	230/50Hz			1-20	100-0%	90-0%	89-0%	90-0%	89-0%	1-20	100-0%	1-20	98-0%	95-0%	98-0%	89-0%	89-0%	89-0%	89-0%	90-0%	89-0%
Jung	254 UDIE1	230/50Hz			1-20	100-0%					1-16	100-7%			98-2%							
Jung	1224 LEDUDE	230/50Hz		LED			86-6%	85-5%														88-5%
Jung	3904 REGHE	230/50Hz			1	98-39%	91-25%	90-24%	91-25%	90-24%	1	99-41%	1-15	96-36%								
Legrand	665114	230/50Hz	400	U	1-20	100-0%	94-0%	93-0%	94-0%	93-0%	1-9	100-0%	1-14	97-0%								
Legrand	574319/574339	230/50Hz	400	U	1-20	100-0%	94-0%	93-0%	94-0%	93-0%	1-9	100-0%	1-14	97-0%								
Legrand	572239/572739	230/50Hz	400	U	1-20	100-0%	94-0%	93-0%	94-0%	93-0%	1-9	100-0%	1-14	97-0%								
Legrand	078407/079207	230/50Hz	400	U	1-20	100-0%	94-0%	93-0%	94-0%	93-0%	1-9	100-0%	1-14	97-0%								
Legrand	048869/048871	230/50Hz	400	U	1-20	100-0%	94-0%	93-0%	94-0%	93-0%	1-9	100-0%	1-14	97-0%								
Legrand	067083/048869	230/50Hz	400	U	1-20	100-0%	94-0%	93-0%	94-0%	93-0%	1-9	100-0%	1-14	97-0%	75-0%	83-0%	93-0%	92-0%	93-0%	92-0%	93-0%	92-0%
Legrand	281084	230/50Hz	500	L	1	99-0%								1-17	97-0%							
Legrand	617030	230/50Hz	600	L										1-20	97-0%							
Legrand	770061	230/50Hz	400	RL							1-14	100-0%	1-15	98-0%								
Legrand	099314	230/50Hz	300	RL			67-2%	66-2%	67-2%	66-2%	1-12	100-0%	1-11	98-0%			66-2%		66-2%		67-2%	66-2%
Legrand	770062	230/50Hz	400	RLC			61-1%	60-1%	83-1%	86-1%	1-16	100-0%	1-15	97-0%			82-1%	86-1%	82-1%	86-1%	82-1%	86-1%
Legrand	617031	230/50Hz	1000	L							1-20	100-3%	1-20	97-1%								
Legrand	078405	230/50Hz	600	RL	1-20	100-0%					1-20	100-0%	1-20	98-0%								
Legrand	752162	230/50Hz	5-60W	T											97-0%	98-0%						
MASTER	DM-DGL	230/50Hz	1000	U / LED			89-37%	87-35%							89-36%	98-40%						
MASTER	DM-2500	230/50Hz	2500	U / LED	1-20	98-0%	86-0%	85-0%			1-20	99-0%	1-20	96-0%	96-0%	96-0%						
Merten	MEGS136-0000	230/50Hz			1-20	100-0%	92-3%	90-0%	92-3%	90-0%	1-20	100-0%	1-20	98-0%	99-0%	97-0%	91-3%	90-0%	91-3%	90-0%	91-3%	90-0%
Merten	MEGS134-0000	230/50Hz			1-20	100-1%	95-0%	93-0%	95-0%	93-0%	1-20	100-1%	1-20	98-1%	98-0%	99-0%	94-0%	93-0%	94-0%	93-0%	94-0%	93-0%
Merten	MEGS139-0000	230/50Hz			1-20	99-0%	92-0%	91-0%	92-0%	91-0%	1-11	99-1%	1-13	98-5%			91-0%	91-0%	91-0%	91-0%	91-0%	91-0%
Merten	MEGS137-0000	230/50Hz			1-20	100-1%	93-1%	92-1%	93-1%	92-1%	1-20	100-7%	1-20	98-1%			92-1%	92-1%	92-1%	92-1%	92-1%	92-1%
Merten	MEGS133-0000	230/50Hz			1-20	99-0%	92-2%	91-2%	92-2%	91-2%	1-20	99-0%	1-20	98-0%			91-2%	91-2%	91-2%	91-2%	91-2%	91-2%
Merten	MEGS138-0000	230/50Hz			1-17	100-0%	90-1%	89-0%			1-17	100-0%	1-15	98-0%	77-0%							
Merten	MEG 5170-0300	230/50Hz	10-200	U	1-2	100-1%	91-0%	89-0%	91-0%	89-0%	1-3	100-0%	1-15	98-0%	99-0%	99-0%	90-0%	89-0%	90-0%	89-0%	90-0%	89-0%
Merten	MEG 5131	230/50Hz	40-400	L	1-16	100-0%	95-0%	94-0%	95-0%	94-0%	1-16	99-0%	1-15	98-0%	77-0%	83-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%
Merten	MEG 5132	230/50Hz			1-16	100-0%	95-0%	94-0%	95-0%	94-0%	1-16	99-0%	1-15	98-0%	77-0%	83-0%	94-0%	94-0%	94-0%	94-0%	94-0%	95-0%
Merten	MEG 5140	230/50Hz	9-100	L	1-3	100-0%	93-0%	91-0%	93-0%	91-0%	1-3	99-0%	1-3	98-0%	82-0%	90-0%	92-0%	91-0%	92-0%	91-0%	92-0%	91-0%
Merten	MEG 5135	230/50Hz	60-1000	L	1-20	99-0%	88-0%	87-0%	88-0%	87-0%	1-20	99-0%	1-20	96-0%	94-0%	97-0%	87-0%	87-0%	87-0%	87-0%	87-0%	88-0%
MK	K4501	230/50Hz	180	L	1-2	99-0%	89-1%	87-1%	89-1%	87-6%	1-4	99-0%	1-5	97-0%	77-0%	89-0%	88-1%	87-7%	88-1%	87-7%	88-1%	87-6%
NEXUS	881P-01	230/50Hz	400	L	1-7	100-0%	93-1%	92-1%	93-1%	92-1%	1-11	100-0%	1-11	97-0%	90-0%	95-0%	92-1%	92-1%	92-1%	92-1%	92-1%	93-1%

DIMMER KOMPATIBILITÄT PAR16

Legend					PARATHOM PRO PAR16 35 36°	PARATHOM PRO PAR16 50 36°	PARATHOM PRO PAR16 80 36°	PARATHOM DIM PAR16 35 36°	PARATHOM DIM PAR16 50 36°	PARATHOM DIM PAR16 50 36° E14	PARATHOM DIM PAR16 80 36°	PARATHOM DIM PAR16 80 60°	PARATHOM DIM PAR16 80 120°	PARATHOM DIM PAR16 100 36°								
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																						
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)					EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code								
Undesired dimmability					4058075260016 / AC16503 4058075259997 / AC16504 4058075259898 / AC16505	4058075448728 / AC24597 4058075448704 / AC24598 4058075448681 / AC24599	4058075449107 / AC24600 4058075449084 / AC24601 4058075449060 / AC24602	4058075259973 / AC16509 4058075259959 / AC16510 4058075259874 / AC16511	4058075260139 / AC16512 4058075260115 / AC16513 4058075260054 / AC16514	4058075448360 / AC24564	4058075449282 / AC24603 4058075449268 / AC24604 4058075449244 / AC24605	4058075449220 / AC24606 4058075449183 / AC24608 4058075449206 / AC24607	4058075449169 / AC24609 4058075449145 / AC24610 4058075449121 / AC24611	4058075449343 / AC24612 4058075449329 / AC24613 4058075449305 / AC24614								
Not tested																						
Dimmer					Number of Lamps	Dimming range	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
Brand	Model	Voltage range	Power	Type																		
NIKO	310-01900	230/50Hz	5-200	U	1-5	99-0%	95-0%	93-0%	95-0%	93-0%	1-6	99-0%	1-7	96-0%	96-0%	98-0%	94-0%	93-0%	94-0%	93-0%	93-0%	93-0%
NIKO	330-00700	230/50Hz	5-200	U	1-6	99-0%	93-0%	92-0%	93-0%	92-0%	1-5	99-0%	1-7	96-0%	96-0%	98-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%
Odace	S520512	230/50Hz			1-20	100-1%	95-0%	93-0%	95-0%	93-0%	1-20	100-1%	1-20	98-1%	98-0%	99-0%	94-0%	93-0%	94-0%	93-0%	93-0%	93-0%
Odace	S520511	230/50Hz			1-20	99-0%	92-2%	91-2%	92-2%	91-2%	1-20	99-0%	1-20	98-0%			91-2%	91-2%	91-2%	91-2%	91-2%	91-2%
Odace	S520515	230/50Hz			1-17	100-0%	90-1%	89-0%			1-17	100-0%	1-15	98-0%	77-0%							
Odace	S520518	230/50Hz			1-3	100-0%	93-0%	91-0%	93-0%	91-0%	1-3	99-0%	1-3	98-0%	82-0%	90-0%	92-0%	91-0%	92-0%	91-0%	92-0%	91-0%
Osram	HTI DALI 315 DIM	230/50Hz	20-315	DALI-T	1-20	100-0%	96-0%	94-0%	96-0%	94-0%	1-2	100-0%	1-20	98-0%	97-0%	99-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%
PEHA	435 HAN	230/50Hz	60-600	L			92-0%	91-0%	92-0%	91-0%	1-20	100-2%	1-20	98-0%	82-0%	90-0%	91-0%	91-0%	91-0%	91-0%	91-0%	91-0%
Schneider	400GLI	230/50Hz	40-400	T			94-3%	91-0%	94-3%	91-0%	1-11	100-0%	1-12	97-0%	92-0%	95-0%	92-3%	90-0%	92-3%	90-0%	92-3%	91-0%
Schneider	SBD315RC	230/50Hz			1-20	100-0%	92-3%	90-0%	92-3%	90-0%	1-20	100-0%	1-20	98-0%	99-0%	97-0%	91-3%	90-0%	91-3%	90-0%	92-3%	90-0%
Schneider	SBD200LED	230/50Hz	400		1-20	100-1%	95-0%	93-0%	95-0%	93-0%	1-20	100-1%	1-20	98-1%	98-0%	99-0%	94-0%	93-0%	94-0%	93-0%	94-0%	93-0%
Schneider	SBD600RCL	230/50Hz			1-20	99-0%	92-0%	91-0%	92-0%	91-0%	1-11	99-1%	1-13	98-5%			91-0%	91-0%	91-0%	91-0%	91-0%	91-0%
Schneider	SBD630RC	230/50Hz			1-20	100-1%	93-1%	92-1%	93-1%	92-1%	1-20	100-7%	1-20	98-1%			92-1%	92-1%	92-1%	92-1%	92-1%	92-1%
Schneider	SBD600RL	230/50Hz			1-20	99-0%	92-2%	91-2%	92-2%	91-2%	1-20	99-0%	1-20	98-0%			91-2%	91-2%	91-2%	91-2%	91-2%	91-2%
Schneider	SBD420RCL	230/50Hz			1-17	100-0%	90-1%	89-0%			1-17	100-0%	1-15	98-0%	77-0%							
Schneider	5170	230/50Hz			1-2	100-1%	91-0%	89-0%	91-0%	89-0%	1-3	100-0%	1-15	98-0%	99-0%	99-0%	90-0%	89-0%	90-0%	89-0%	90-0%	89-0%
Schneider	SBD400RL	230/50Hz			1-16	100-0%	95-0%	94-0%	95-0%	94-0%	1-16	99-0%	1-15	98-0%	77-0%	83-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%
Schneider	SBD5PL	230/50Hz			1-3	100-0%	93-0%	91-0%	93-0%	91-0%	1-3	99-0%	1-3	98-0%	82-0%	90-0%	92-0%	91-0%	92-0%	91-0%	92-0%	91-0%
Schneider	ATTD1000RL	230/50Hz			1-20	99-0%	88-0%	87-0%	88-0%	87-0%	1-20	99-0%	1-20	96-0%	94-0%	97-0%	87-0%	87-0%	87-0%	87-0%	87-0%	87-0%
Shuttle	SDIM-T-LED-500W	230/50Hz	2-500	T & LED-T	1-20	100-0%	93-0%	92-0%	93-0%	92-0%	1-20	100-0%	1-20	98-0%	96-0%	98-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%
Siemens	STC8 284	230/50Hz	20-525	T	1-20	100-1%	88-0%	87-0%	88-0%	87-0%	1-20	100-3%	1-2	98-2%	82-0%	75-0%	87-0%	87-0%	87-0%	87-0%	87-0%	87-0%
Siemens	SWG1-527-1AB31	230/50Hz	20-500	KNX-U	1-20	98-0%	86-0%	85-0%	86-0%	85-0%	1-20	99-0%	1-20	96-0%			85-0%	84-0%	85-0%	84-0%	85-0%	84-0%
VADSBO	LD 220	230/50Hz	1-200	U	1-18	100-0%	90-1%	89-1%	90-1%	89-1%	1-16	100-0%	1-14	98-0%			89-1%	89-1%	89-1%	89-1%	89-1%	89-1%
VARILIGHT	HQ3W	230/50Hz	400		1-20	100-0%	66-0%	65-0%	66-0%	65-0%	1-20	100-0%	1-20	97-0%		90-0%	65-0%	65-0%	65-0%	65-0%	65-0%	65-0%
VARILIGHT	JQP401W	230/50Hz	400	T			87-3%		87-3%						96-6%	98-12%				87-3%		87-3%
Vimar	20135	230/50Hz	3-100	U	1-8	100-0%	86-1%	85-1%	86-1%	85-1%	1-8	100-0%	1-7	98-0%	95-1%	98-2%	85-1%	85-1%	85-1%	85-1%	85-1%	85-1%
ZANO	WH401	230/50Hz	400	L	1-5	98-0%	61-3%	61-3%	93-3%	61-3%	1-11	100-0%	1-11	97-0%	86-0%	93-0%	99-3%	60-3%	99-3%	60-3%	99-3%	61-3%
ZANO	WH251	230/50Hz	250												96-0%	98-0%			53-0%		53-0%	
ZANO	Z GRID 700	230/50Hz	250	LED				63-0%					1-18	56-0%	95-0%	98-0%						
ZANO	Z GRID 500	230/50Hz	500				90-0%		90-0%	89-0%			1-13	97-0%	86-0%		89-0%	89-0%	89-0%	89-0%	89-0%	89-0%

Please Note:

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. OSRAM does not take over any responsibility, warranty or liability that this results can also achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonics or electronic resonance).
- Subject to change without notice
- Errors and omission excepted
- Always make sure to use the most recent release

Application Notes:

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

Bitte beachten:

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. OSRAM übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

Anwendungshinweis:

- Um bestmögliche Dimmergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.

LEDVANCE GmbH

Head Office:

Parkring 29-33
85748 Garching, Germany
Phone +49 89 780673-100
Fax +49 89 780673-XXX
www.ledvance.com