


DIMMER COMPATIBILITY PAR16

BASIC INFORMATION:

1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:

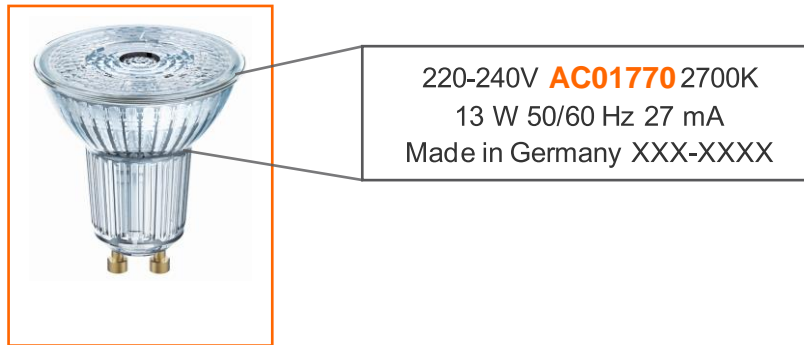

2. HOW CAN I READ THE FOLLOWING CHARTS?

Legend:
Information about the dimmability of the lamps. Green means good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend					PARATHOM PRO PAR16							
Good dimmability with indicated number of lamps (dimming range greater than 75%)					50 36°		80 36°		80 36°		80 60°	
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)												
Undesired dimmability					EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code	
Not tested					4058075448728 / AC24597		4058075449107 / AC24600		4058075449282 / AC24603		4058075449220 / AC24606	
					4058075448704 / AC24598		4058075449084 / AC24601		4058075449268 / AC24604		4058075449193 / AC24608	
					4058075448681 / AC24599		4058075449060 / AC24602		4058075449244 / AC24605		4058075449206 / AC24607	
Dimmer					Dimming range 1 Lamp		Dimming range 4 Lamps		Dimming range 1 Lamp		Dimming range 4 Lamps	
Brand	Model	Voltage range	Power	Type	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps
ABB	STD 50-3	230/50Hz	60-500	L	58-0%	57-0%	86-0%	74-0%	85-0%	87-0%	85-0%	87-0%
Altenburger	50,3	230/50Hz			93-0%	92-0%	93-0%	92-0%	92-0%	92-0%	92-0%	92-0%
AURORA	DSP 400	230/50Hz	400	L	90-0%	89-0%	90-0%	89-0%	89-0%	89-0%	89-0%	89-0%
Berker	2861	230/50Hz	50-420	U	89-0%	88-0%	89-0%	88-0%	88-0%	88-0%	88-0%	88-0%
Bticino	L/N/NT4411N	230/50Hz			94-0%	93-0%	94-0%	93-0%	93-0%	92-0%	93-0%	92-0%
Busch-Jaeger	6513 U-102	230/50Hz	420	T	95-2%	93-0%						
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	95-3%	93-3%	95-3%	93-3%	94-3%	93-3%	94-3%	93-3%
Busch-Jaeger	2250 U	230/50Hz	60-600	L	50-1%	87-1%	93-1%	87-1%	90-1%	87-1%	90-1%	87-1%
Busch-Jaeger	6526 U	230/50Hz			94-40%	93-2%						
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	91-0%	90-0%	91-0%	90-0%	90-0%	90-0%	90-0%	90-0%
DimMax	420SL	230/50Hz	200	L/T	93-0%	91-0%	93-0%	91-0%	92-0%	91-0%	92-0%	91-0%
DINUY	RE EL1 LE1	230/50Hz	400	LED	92-0%	91-0%	92-0%	91-0%	91-0%	91-0%	91-0%	91-0%
ELKO	400GLU	230/50Hz			94-3%	91-0%	94-3%	91-0%	92-3%	90-0%	92-3%	90-0%
ELKO	315GLE	230/50Hz	20-315	T	92-3%	90-0%	92-3%	90-0%	91-3%	90-0%	91-3%	90-0%
ELKO	600GLE/I	230/50Hz			92-0%	91-0%	92-0%	91-0%	91-0%	91-0%	91-0%	91-0%
ELKO	600GLU	230/50Hz	40-600	U	92-2%	91-2%	92-2%	91-2%	91-2%	91-2%	91-2%	91-2%

Information about the lamp type

Assessment of the results into categories. Includes the number of lamps and the related dimming range

DIMMER KOMPATIBILITÄT PAR16

BASISINFORMATIONEN:

1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.



220-240V **AC01770** 2700K
 13 W 50/60 Hz 27 mA
 Made in Germany XXX-XXXX

2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes Dimmverhalten auftreten kann etc.

Liste der getesteten Dimmer

Legend						PARATHOM PRO PAR16 50 36°	PARATHOM PRO PAR16 80 36°	PARATHOM DIM PAR16 80 36°	PARATHOM DIM PAR16 80 60°
Good dimmability with indicated number of lamps (dimming range greater than 75%)									
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)									
Undesired dimmability									
Not tested									
Dimmer						EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code
Brand	Model	Voltage	Power	Type		4058075448728 / AC24597	40580754449107 / AC24600	4058075449282 / AC24603	4058075449220 / AC24608
ABB	STD 50-3	230/50Hz	60-500	L	Dimming range 1 Lamp	4058075448704 / AC24598	4058075449094 / AC24601	4058075449268 / AC24604	4058075449183 / AC24608
Altenburger	50_3	230/50Hz			4 Lamps	4058075448681 / AC24599	4058075449060 / AC24602	4058075449244 / AC24605	4058075449206 / AC24607
AURORA	DSP 400	230/50Hz	400	L	58-0%				
Berker	2861	230/50Hz	50-420	U	57-0%				
Bticino	L/N/NT4411N	230/50Hz			86-0%				
Busch-Jaeger	6513 U-102	230/50Hz	420	T	74-0%				
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	85-0%				
Busch-Jaeger	2250 U	230/50Hz	60-600	L	87-0%				
Busch-Jaeger	6526 U	230/50Hz			89-0%				
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	88-0%				
DimMax	420SL	230/50Hz	200	L/T	94-0%				
DINUY	RE ELI LE1	230/50Hz	400	LED	95-2%				
ELKO	400GL	230/50Hz			93-0%				
ELKO	315GLE	230/50Hz	20-315	T	93-3%				
ELKO	600GLE/I	230/50Hz			95-3%				
ELKO	600GL	230/50Hz	40-600	U	99-2%				











Angaben zum Lampentyp

Bewertung der Testergebnisse im Ampelsystem. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich











DIMMER COMPATIBILITY PAR16

Legend						PARATHOM PRO PAR16 35 36°	PARATHOM PRO PAR16 50 36°	PARATHOM PRO PAR16 80 36°	PARATHOM DIM PAR16 35 36°	PARATHOM DIM PAR16 50 36°	PARATHOM DIM PAR16 50 36° E14	PARATHOM DIM PAR16 80 36°	PARATHOM DIM PAR16 80 60°	PARATHOM DIM PAR16 80 120°	PARATHOM DIM PAR16 100 36°										
Good dimmability with indicated number of lamps (dimming range greater than 75%)																									
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																									
Undesired dimmability																									
Not tested																									
						EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code										
						4058075260016 / AC16503 4058075259997 / AC16504 4058075259898 / AC16505	4058075448728 / AC24597 4058075448704 / AC24598 4058075448681 / AC24599	4058075449107 / AC24600 4058075449084 / AC24601 4058075449060 / AC24602	4058075259973 / AC16509 4058075259959 / AC16510 4058075259874 / AC16511	4058075260139 / AC16512 4058075260115 / AC16513 4058075260054 / AC16514	4058075448360 / AC24564	4058075449282 / AC24603 4058075449268 / AC24604 4058075449244 / AC24605	4058075449220 / AC24606 4058075449183 / AC24608 4058075449206 / AC24607	4058075449169 / AC24609 4058075449145 / AC24610 4058075449121 / AC24611	4058075449343 / AC24612 4058075449329 / AC24613 4058075449305 / AC24614										
Dimmer						Number of Lamps	Dimming range	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Number of Lamps	Dimming range	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps		
Brand	Model	Voltage range	Power	Type																					
ABB	STD 50-3	230/50Hz	60-500	L	1-20	98-10%	58-0%	57-0%	86-0%	74-0%	1-20	99-2%	1-18	97-1%	80-0%	81-0%	85-0%	87-0%	85-0%	87-0%	85-0%	87-0%	86-0%	74-0%	
Altenburger	50,3	230/50Hz					93-0%	92-0%	93-0%	92-0%	1-3	99-0%	1-20	98-0%			92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%	93-0%	92-0%
AURORA	DSP 400	230/50Hz	400	L			90-0%	89-0%	90-0%	89-0%	1-11	99-0%	1-10	95-0%	83-0%	89-0%	89-0%	89-0%	89-0%	89-0%	89-0%	89-0%	90-0%	89-0%	
Berker	2861	230/50Hz	50-420	U			89-0%	88-0%	89-0%	88-0%	1-10	99-0%	1-20	97-0%	89-6%		88-0%	88-0%	88-0%	88-0%	88-0%	88-0%	89-0%	88-0%	
Bticino	L/N/NT4411N	230/50Hz			1-20	100-0%	94-0%	93-0%	94-0%	93-0%	1-9	100-0%	1-14	97-0%			93-0%	92-0%	93-0%	92-0%	93-0%	92-0%	94-0%	93-0%	
Bticino	L/N/NT4408	230/50Hz			1-20	100-0%					1-20	100-0%	1-20	98-0%											
Bticino	NT4402N	230/50Hz	500	R											68-0%										
Busch-Jaeger	6513 U-102	230/50Hz	420	T	1-20	100-0%	95-2%	93-0%			1-20	100-0%	1-20	97-3%	97-0%	98-0%									
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	1-9	99-9%	95-3%	93-3%	95-3%	93-3%	1-4	100-9%	1-7	97-6%	78-0%	85-0%	94-3%	93-3%	94-3%	93-3%	94-3%	93-3%	95-3%	93-3%	
Busch-Jaeger	2250 U	230/50Hz	60-600	L			50-1%	87-1%	93-1%	87-1%					96-0%		90-1%	87-1%	90-1%	87-1%	90-1%	87-1%	93-1%	87-1%	
Busch-Jaeger	6526 U	230/50Hz			1-20	100-19%	94-40%	93-2%			1-20	99-20%	1-16	98-24%											
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	1-4	99-0%	91-0%	90-0%	91-0%	90-0%	1-4	99-0%	1-9	97-0%	82-0%	89-0%	90-0%	90-0%	90-0%	90-0%	90-0%	90-0%	91-0%	90-0%	
DimMax	420SL	230/50Hz	200	L/T			93-0%	91-0%	93-0%	91-0%							92-0%	91-0%	92-0%	91-0%	92-0%	91-0%	93-0%	91-0%	
DINUY	RE ELI LE1	230/50Hz	400	LED			92-0%	91-0%	92-0%	91-0%							91-0%	91-0%	91-0%	91-0%	91-0%	91-0%	92-0%	91-0%	
Domintell	DimMax 420 SL	230/50Hz	200	L/T	1-20	100-0%					1-16	100-0%	1-13	97-0%			92-0%	91-0%	92-0%	91-0%	92-0%	91-0%	93-0%	91-0%	
ELKO	400GLI	230/50Hz					94-3%	91-0%	94-3%	91-0%	1-11	100-0%	1-12	97-0%	92-0%	95-0%	92-3%	90-0%	92-3%	90-0%	92-3%	90-0%	94-3%	91-0%	
ELKO	315GLE	230/50Hz	20-315	T	1-20	100-0%	92-3%	90-0%	92-3%	90-0%	1-20	100-0%	1-20	98-0%	99-0%	97-0%	91-3%	90-0%	91-3%	90-0%	91-3%	90-0%	92-3%	90-0%	
ELKO	600GLE/I	230/50Hz			1-20	99-0%	92-0%	91-0%	92-0%	91-0%	1-11	99-1%	1-13	98-5%			91-0%	91-0%	91-0%	91-0%	91-0%	91-0%	92-0%	91-0%	
ELKO	600GLI	230/50Hz	40-600	U	1-20	99-0%	92-2%	91-2%	92-2%	91-2%	1-20	99-0%	1-20	98-0%			91-2%	91-2%	91-2%	91-2%	91-2%	91-2%	92-2%	91-2%	
ELKO	420GLE/I	230/50Hz	40-420	U	1-17	100-0%	90-1%	89-0%			1-17	100-0%	1-15	98-0%	77-0%										
ELKO	1000LRI	230/50Hz			1-20	99-0%	88-0%	87-0%	88-0%	87-0%	1-20	99-0%	1-20	96-0%	94-0%	97-0%	87-0%	87-0%	87-0%	87-0%	87-0%	87-0%	88-0%	87-0%	
ELKO	630GLE	230/50Hz	20-630	U	1-20	100-1%	93-1%	92-1%	93-1%	92-1%	1-20	100-7%	1-20	98-1%			92-1%	92-1%	92-1%	92-1%	92-1%	92-1%	93-1%	92-1%	
Eltako	EUD61NPN-UC	230/50Hz	5-400	R / L / C	1-14	100-0%	90-1%	88-1%	90-1%	88-1%	1-15	100-0%	1-14	97-0%		98-43%	89-1%	88-1%	89-1%	88-1%	89-1%	88-1%	90-1%	88-1%	
Feller	40200.LEDxxx	230/50Hz			1-20	100-1%	95-0%	93-0%	95-0%	93-0%	1-20	100-1%	1-20	98-1%	98-0%	99-0%	94-0%	93-0%	94-0%	93-0%	94-0%	93-0%	95-0%	93-0%	
Feller	40600.RLC	230/50Hz	20-600	U	1-20	99-0%	92-0%	91-0%	92-0%	91-0%	1-11	99-1%	1-13	98-5%			91-0%	91-0%	91-0%	91-0%	91-0%	91-0%	92-0%	91-0%	
Feller	40600.RC	230/50Hz			1-20	100-1%	93-1%	92-1%	93-1%	92-1%	1-20	100-7%	1-20	98-1%			92-1%	92-1%	92-1%	92-1%	92-1%	92-1%	93-1%	92-1%	
Feller	40600.RL	230/50Hz			1-20	99-0%	92-2%	91-2%	92-2%	91-2%	1-20	99-0%	1-20	98-0%			91-2%	91-2%	91-2%	91-2%	91-2%	91-2%	92-2%	91-2%	
Feller	40420.RLC	230/50Hz			1-17	100-0%	90-1%	89-0%			1-17	100-0%	1-15	98-0%	77-0%										
Feller	31000	230/50Hz			1-20	99-0%	88-0%	87-0%	88-0%	87-0%	1-20	99-0%	1-20	96-0%	94-0%	97-0%	87-0%	87-0%	87-0%	87-0%	87-0%	87-0%	88-0%	87-0%	
Gira	226200	230/50Hz			1-20	100-0%	91-0%	89-0%	91-0%	89-0%	1-20	100-0%	1-18	97-0%	86-0%	90-0%	90-0%	89-0%	90-0%	89-0%	90-0%	89-0%	91-0%	89-0%	
Gira	030700	230/50Hz	20-525	T	1-20	100-0%	90-0%	89-0%	90-0%	89-0%	1-20	100-0%	1-20	98-0%	95-0%	98-0%	89-0%	89-0%	89-0%	89-0%	89-0%	89-0%	90-0%	89-0%	
Gira	117600	230/50Hz	50-420	U	1-20	100-0%					1-16	100-7%			98-2%										
Gira	217400	230/50Hz	4X20-250	KNX-U	1	98-39%	91-25%	90-24%	91-25%	90-24%	1	99-41%	1-15	96-36%			90-29%	90-27%	90-29%	90-27%	90-29%	90-27%	91-25%	90-24%	
Hager	WUD87	230/50Hz	400	LED-U	1-20	100-0%	93-0%	91-0%	93-0%	91-0%	1-18	100-0%	1-16	98-0%			92-0%	91-0%	92-0%	91-0%	92-0%	91-0%	93-0%	91-0%	
Hamilton	KP1X40	230/50Hz	400																						

DIMMER COMPATIBILITY PAR16

Legend						PARATHOM PRO PAR16 35 36°	PARATHOM PRO PAR16 50 36°	PARATHOM PRO PAR16 80 36°	PARATHOM DIM PAR16 35 36°	PARATHOM DIM PAR16 50 36°	PARATHOM DIM PAR16 50 36° E14	PARATHOM DIM PAR16 80 36°	PARATHOM DIM PAR16 80 60°	PARATHOM DIM PAR16 80 120°	PARATHOM DIM PAR16 100 36°											
Good dimmability with indicated number of lamps (dimming range greater than 75%)																										
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																										
Undesired dimmability																										
Not tested																										
						EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code											
						4058075260016 / AC16503 4058075259997 / AC16504 4058075259898 / AC16505	4058075448728 / AC24597 4058075448704 / AC24598 4058075448681 / AC24599	4058075449107 / AC24600 4058075449084 / AC24601 4058075449060 / AC24602	4058075259973 / AC16509 4058075259959 / AC16510 4058075259874 / AC16511	4058075260139 / AC16512 4058075260115 / AC16513 4058075260054 / AC16514	4058075448360 / AC24564	4058075449282 / AC24603 4058075449268 / AC24604 4058075449244 / AC24605	4058075449220 / AC24606 4058075449183 / AC24608 4058075449206 / AC24607	4058075449169 / AC24609 4058075449145 / AC24610 4058075449121 / AC24611	4058075449343 / AC24612 4058075449329 / AC24613 4058075449305 / AC24614											
Dimmer						Number of Lamps	Dimming range	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Number of Lamps	Dimming range	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps					
Brand	Model	Voltage range	Power	Type																						
Hugo Müller	paladin 872110 led	230/50Hz	20-500	L	1-20	100-0%	92-0%	91-0%	92-0%	91-0%	1-20	100-0%	1-18	97-0%	86-0%	90-0%	90-0%	89-0%	90-0%	89-0%	90-0%	89-0%				
Jung	225 NVDE	230/50Hz	20-500	L	1-20	100-0%	90-0%	89-0%	90-0%	89-0%	1-20	100-0%	1-20	98-0%	95-0%	98-0%	89-0%	89-0%	89-0%	89-0%	89-0%	90-0%	89-0%			
Jung	254 UDIE1	230/50Hz			1-20	100-0%					1-16	100-7%			98-2%											
Jung	1224 LEDUDE	230/50Hz		LED			86-6%	85-5%							98-0%								88-5%			
Jung	3904 REGHE	230/50Hz			1	98-39%	91-25%	90-24%	91-25%	90-24%	1	99-41%	1-15	96-36%			90-29%	90-27%	90-29%	90-27%	90-29%	90-27%	91-25%	90-24%		
Legrand	665114	230/50Hz	400	U	1-20	100-0%	94-0%	93-0%	94-0%	93-0%	1-9	100-0%	1-14	97-0%			93-0%	92-0%	93-0%	92-0%	93-0%	92-0%	94-0%	93-0%		
Legrand	574319/574339	230/50Hz	400	U	1-20	100-0%	94-0%	93-0%	94-0%	93-0%	1-9	100-0%	1-14	97-0%			93-0%	92-0%	93-0%	92-0%	93-0%	92-0%	94-0%	93-0%		
Legrand	572239/572739	230/50Hz	400	U	1-20	100-0%	94-0%	93-0%	94-0%	93-0%	1-9	100-0%	1-14	97-0%			93-0%	92-0%	93-0%	92-0%	93-0%	92-0%	94-0%	93-0%		
Legrand	078407/079207	230/50Hz	400	U	1-20	100-0%	94-0%	93-0%	94-0%	93-0%	1-9	100-0%	1-14	97-0%			93-0%	92-0%	93-0%	92-0%	93-0%	92-0%	94-0%	93-0%		
Legrand	048869/048871	230/50Hz	400	U	1-20	100-0%	94-0%	93-0%	94-0%	93-0%	1-9	100-0%	1-14	97-0%			93-0%	92-0%	93-0%	92-0%	93-0%	92-0%	94-0%	93-0%		
Legrand	067083/048869	230/50Hz	400	U	1-20	100-0%	94-0%	93-0%	94-0%	93-0%	1-9	100-0%	1-14	97-0%	75-0%	83-0%	93-0%	92-0%	93-0%	92-0%	93-0%	92-0%	94-0%	93-0%		
Legrand	281084	230/50Hz	500	L	1	99-0%							1-17	97-0%												
Legrand	617030	230/50Hz	600	L									1-20	97-0%												
Legrand	770061	230/50Hz	400	RL									1-14	100-0%	1-15	98-0%										
Legrand	099314	230/50Hz	300	RL			67-2%	66-2%	67-2%	66-2%	1-12	100-0%	1-11	98-0%			66-2%		66-2%		66-2%		67-2%	66-2%		
Legrand	770062	230/50Hz	400	RLC			61-1%	60-1%	83-1%	86-1%	1-16	100-0%	1-15	97-0%	97-0%	98-0%	82-1%	86-1%	82-1%	86-1%	82-1%	86-1%	83-1%	86-1%		
Legrand	617031	230/50Hz	1000	L							1-20	100-3%	1-20	97-1%												
Legrand	078405	230/50Hz	600	RL	1-20	100-0%					1-20	100-0%	1-20	98-0%												
MASTER	DM-DGL	230/50Hz	1000	U / LED			89-37%	87-35%							89-36%	98-40%										
MASTER	DM-2500	230/50Hz	2500	U / LED	1-20	98-0%	86-0%	85-0%			1-20	99-0%	1-20	96-0%	96-0%	96-0%										
Merten	MEG5136-0000	230/50Hz			1-20	100-0%	92-3%	90-0%	92-3%	90-0%	1-20	100-0%	1-20	98-0%	99-0%	97-0%	91-3%	90-0%	91-3%	90-0%	91-3%	90-0%	92-3%	90-0%		
Merten	MEG5134-0000	230/50Hz			1-20	100-1%	95-0%	93-0%	95-0%	93-0%	1-20	100-1%	1-20	98-1%	98-0%	99-0%	94-0%	93-0%	94-0%	93-0%	94-0%	93-0%	95-0%	93-0%		
Merten	MEG5139-0000	230/50Hz			1-20	99-0%	92-0%	91-0%	92-0%	91-0%	1-11	99-1%	1-13	98-5%			91-0%	91-0%	91-0%	91-0%	91-0%	91-0%	92-0%	91-0%		
Merten	MEG5137-0000	230/50Hz			1-20	100-1%	93-1%	92-1%	93-1%	92-1%	1-20	100-7%	1-20	98-1%			92-1%	92-1%	92-1%	92-1%	92-1%	92-1%	93-1%	92-1%		
Merten	MEG5133-0000	230/50Hz			1-20	99-0%	92-2%	91-2%	92-2%	91-2%	1-20	99-0%	1-20	98-0%			91-2%	91-2%	91-2%	91-2%	91-2%	91-2%	92-2%	91-2%		
Merten	MEG5138-0000	230/50Hz			1-17	100-0%	90-1%	89-0%			1-17	100-0%	1-15	98-0%	77-0%											
Merten	MEG 5170-0300	230/50Hz	10-200	U	1-2	100-1%	91-0%	89-0%	91-0%	89-0%	1-3	100-0%	1-15	98-0%	99-0%	99-0%	90-0%	89-0%	90-0%	89-0%	90-0%	89-0%	91-0%	89-0%		
Merten	MEG 5131	230/50Hz	40-400	L	1-16	100-0%	95-0%	94-0%	95-0%	94-0%	1-16	99-0%	1-15	98-0%	77-0%	83-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	95-0%	94-0%		
Merten	MEG 5132	230/50Hz			1-16	100-0%	95-0%	94-0%	95-0%	94-0%	1-16	99-0%	1-15	98-0%	77-0%	83-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%	95-0%	94-0%		
Merten	MEG 5140	230/50Hz	9-100	L	1-3	100-0%	93-0%	91-0%	93-0%	91-0%	1-3	99-0%	1-3	98-0%	82-0%	90-0%	92-0%	91-0%	92-0%	91-0%	92-0%	91-0%	93-0%	91-0%		
Merten	MEG 5135	230/50Hz	60-1000	L	1-20	99-0%	88-0%	87-0%	88-0%	87-0%	1-20	99-0%	1-20	96-0%	94-0%	97-0%	87-0%	87-0%	87-0%	87-0%	87-0%	87-0%	88-0%	87-0%		
MK	K4501	230/50Hz	180	L	1-2	99-0%	89-1%	87-1%	89-1%	87-6%	1-4	99-0%	1-5	97-0%	77-0%	89-0%	88-1%	87-7%	88-1%	87-7%	88-1%	87-7%	89-1%	87-6%		
NEXUS	881P-01	230/50Hz	400	L	1-7	100-0%	93-1%	92-1%	93-1%	92-1%	1-11	100-0%	1-11	97-0%	90-0%	95-0%	92-1%	92-1%	92-1%	92-1%	92-1%	92-1%	93-1%	92-1%		
NIKO	310-01900	230/50Hz	5-200	U	1-5	99-0%	95-0%	93-0%	95-0%	93-0%	1-6	99-0%	1-7	96-0%	96-0%	98-0%	94-0%	93-0%	94-0%	93-0%	94-0%	93-0%	95-0%	93-0%		

DIMMER COMPATIBILITY PAR16

Legend					PARATHOM PRO PAR16 35 36°	PARATHOM PRO PAR16 50 36°	PARATHOM PRO PAR16 80 36°	PARATHOM DIM PAR16 35 36°	PARATHOM DIM PAR16 50 36°	PARATHOM DIM PAR16 50 36° E14	PARATHOM DIM PAR16 80 36°	PARATHOM DIM PAR16 80 60°	PARATHOM DIM PAR16 80 120°	PARATHOM DIM PAR16 100 36°								
Good dimmability with indicated number of lamps (dimming range greater than 75%)																						
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)					EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code								
Undesired dimmability					4058075260016 / AC16503 4058075259997 / AC16504 4058075259898 / AC16505	4058075448728 / AC24597 4058075448704 / AC24598 4058075448681 / AC24599	4058075449107 / AC24600 4058075449084 / AC24601 4058075449060 / AC24602	4058075259973 / AC16509 4058075259959 / AC16510 4058075259874 / AC16511	4058075260139 / AC16512 4058075260115 / AC16513 4058075260054 / AC16514	4058075448360 / AC24564	4058075449282 / AC24603 4058075449268 / AC24604 4058075449244 / AC24605	4058075449220 / AC24606 4058075449183 / AC24608 4058075449206 / AC24607	4058075449169 / AC24609 4058075449145 / AC24610 4058075449121 / AC24611	4058075449343 / AC24612 4058075449329 / AC24613 4058075449305 / AC24614								
Not tested																						
Dimmer					Number of Lamps	Dimming range	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
Brand	Model	Voltage range	Power	Type																		
NIKO	330-00700	230/50Hz	5-200	U	1-6	99-0%	93-0%	92-0%	93-0%	92-0%	1-5	99-0%	1-7	96-0%	96-0%	98-0%	92-0%	92-0%	92-0%	92-0%	93-0%	92-0%
Odace	S520512	230/50Hz			1-20	100-1%	95-0%	93-0%	95-0%	93-0%	1-20	100-1%	1-20	98-1%	98-0%	99-0%	94-0%	93-0%	94-0%	93-0%	94-0%	93-0%
Odace	S520511	230/50Hz			1-20	99-0%	92-2%	91-2%	92-2%	91-2%	1-20	99-0%	1-20	98-0%			91-2%	91-2%	91-2%	91-2%	91-2%	91-2%
Odace	S520515	230/50Hz			1-17	100-0%	90-1%	89-0%			1-17	100-0%	1-15	98-0%	77-0%							
Odace	S520518	230/50Hz			1-3	100-0%	93-0%	91-0%	93-0%	91-0%	1-3	99-0%	1-3	98-0%	82-0%	90-0%	92-0%	91-0%	92-0%	91-0%	92-0%	91-0%
Osram	HTI DALI 315 DIM	230/50Hz	20-315	DALI-T	1-20	100-0%	96-0%	94-0%	96-0%	94-0%	1-2	100-0%	1-20	98-0%	97-0%	99-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%
PEHA	435 HAN	230/50Hz	60-600	L			92-0%	91-0%	92-0%	91-0%	1-20	100-2%	1-20	98-0%	82-0%	90-0%	91-0%	91-0%	91-0%	91-0%	91-0%	91-0%
Schneider	400GLI	230/50Hz	40-400	T			94-3%	91-0%	94-3%	91-0%	1-11	100-0%	1-12	97-0%	92-0%	95-0%	92-3%	90-0%	92-3%	90-0%	92-3%	90-0%
Schneider	SBD315RC	230/50Hz			1-20	100-0%	92-3%	90-0%	92-3%	90-0%	1-20	100-0%	1-20	98-0%	99-0%	97-0%	91-3%	90-0%	91-3%	90-0%	91-3%	90-0%
Schneider	SBD200LED	230/50Hz	400		1-20	100-1%	95-0%	93-0%	95-0%	93-0%	1-20	100-1%	1-20	98-1%	98-0%	99-0%	94-0%	93-0%	94-0%	93-0%	94-0%	93-0%
Schneider	SBD600RCRL	230/50Hz			1-20	99-0%	92-0%	91-0%	92-0%	91-0%	1-11	99-1%	1-13	98-5%			91-0%	91-0%	91-0%	91-0%	91-0%	91-0%
Schneider	SBD630RC	230/50Hz			1-20	100-1%	93-1%	92-1%	93-1%	92-1%	1-20	100-7%	1-20	98-1%			92-1%	92-1%	92-1%	92-1%	92-1%	92-1%
Schneider	SBD600RL	230/50Hz			1-20	99-0%	92-2%	91-2%	92-2%	91-2%	1-20	99-0%	1-20	98-0%			91-2%	91-2%	91-2%	91-2%	91-2%	91-2%
Schneider	SBD420RCRL	230/50Hz			1-17	100-0%	90-1%	89-0%			1-17	100-0%	1-15	98-0%	77-0%							
Schneider	5170	230/50Hz			1-2	100-1%	91-0%	89-0%	91-0%	89-0%	1-3	100-0%	1-15	98-0%	99-0%	99-0%	90-0%	89-0%	90-0%	89-0%	90-0%	89-0%
Schneider	SBD400RL	230/50Hz			1-16	100-0%	95-0%	94-0%	95-0%	94-0%	1-16	99-0%	1-15	98-0%	77-0%	83-0%	94-0%	94-0%	94-0%	94-0%	94-0%	94-0%
Schneider	SBD5PL	230/50Hz			1-3	100-0%	93-0%	91-0%	93-0%	91-0%	1-3	99-0%	1-3	98-0%	82-0%	90-0%	92-0%	91-0%	92-0%	91-0%	92-0%	91-0%
Schneider	ATTD1000RL	230/50Hz			1-20	99-0%	88-0%	87-0%	88-0%	87-0%	1-20	99-0%	1-20	96-0%	94-0%	97-0%	87-0%	87-0%	87-0%	87-0%	87-0%	87-0%
Shuttle	SDIM-T-LED-500W	230/50Hz	2-500	T & LED-T	1-20	100-0%	93-0%	92-0%	93-0%	92-0%	1-20	100-0%	1-20	98-0%	96-0%	98-0%	92-0%	92-0%	92-0%	92-0%	92-0%	92-0%
Siemens	STC8 284	230/50Hz	20-525	T	1-20	100-1%	88-0%	87-0%	88-0%	87-0%	1-20	100-3%	1-2	98-2%	82-0%	75-0%	87-0%	87-0%	87-0%	87-0%	87-0%	87-0%
Siemens	SWG1-527-1AB31	230/50Hz	20-500	KNX-U	1-20	98-0%	86-0%	85-0%	86-0%	85-0%	1-20	99-0%	1-20	96-0%			85-0%	84-0%	85-0%	84-0%	85-0%	84-0%
VADSBO	LD 220	230/50Hz	1-200	U	1-18	100-0%	90-1%	89-1%	90-1%	89-1%	1-16	100-0%	1-14	98-0%			89-1%	89-1%	89-1%	89-1%	89-1%	89-1%
VARILIGHT	HQ3W	230/50Hz	400		1-20	100-0%	66-0%	65-0%	66-0%	65-0%	1-20	100-0%	1-20	97-0%			65-0%	65-0%	65-0%	65-0%	65-0%	65-0%
VARILIGHT	JQP401W	230/50Hz	400	T				87-3%		87-3%							96-6%	98-12%		87-3%		87-3%
Vimar	20135	230/50Hz	3-100	U	1-8	100-0%	86-1%	85-1%	86-1%	85-1%	1-8	100-0%	1-7	98-0%	95-1%	98-2%	85-1%	85-1%	85-1%	85-1%	85-1%	85-1%
ZANO	WH401	230/50Hz	400	L	1-5	98-0%	61-3%	61-3%	93-3%	61-3%	1-11	100-0%	1-11	97-0%	86-0%	93-0%	99-3%	60-3%	99-3%	60-3%	99-3%	60-3%
ZANO	WH251	230/50Hz	250														96-0%	98-0%		53-0%		53-0%
ZANO	Z GRID 700	230/50Hz	250	LED				63-0%									56-0%	95-0%	98-0%			
ZANO	Z GRID 500	230/50Hz	500				90-0%	89-0%	90-0%	89-0%							97-0%	86-0%	98-0%	89-0%	89-0%	89-0%

Please note:

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. LEDVANCE does not take over any responsibility, warranty or liability that this results can also be achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types.
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonic or electronic resonance).
- Subject to change without notice.
- Errors and omission excepted.
- Always make sure to use the most recent release.

Application Notes:

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

LEDVANCE GmbH

Head Office:

Parkring 29-33
85748 Garching, Germany
Phone +49 89 780673-100
Fax +49 89 780673-XXX
www.ledvance.com

Bitte beachten:

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. LEDVANCE übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

Anwendungshinweis:

- Um bestmögliche Dimmerergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.