


DIMMER COMPATIBILITY PAR16

BASIC INFORMATION:

1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:

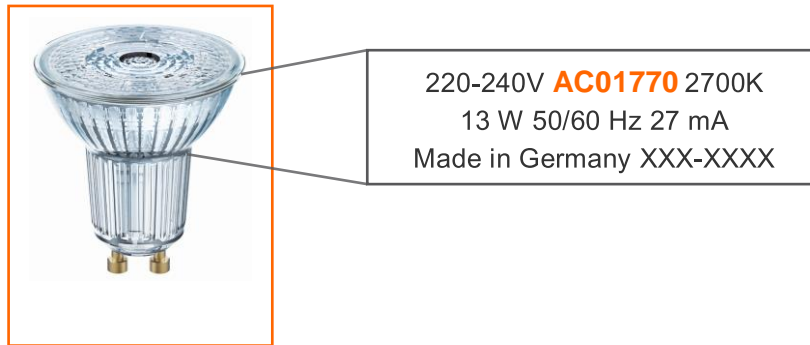

2. HOW CAN I READ THE FOLLOWING CHARTS?

Legend:
Information about the dimmability of the lamps. Green means very good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend					SUPERSTAR PAR16 35 36*				SUPERSTAR PAR16 50 36*				SUPERSTAR PAR16 80 36*				SUPERSTAR PAR16 80 120*				
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																					
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																					
Undesired dimmability																					
Not relevant																					
Not tested																					
EAN/Basic Code					4052839330153/AC01184				405283933017/AC01187				4052839330218/AB41905				405807503658/AC03043				
EAN/Basic Code					4052839330157/AC01182				4052839330195/AC01184				4052839330232/AB41906				405807503658/AC03051				
Dimmer					Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range		
Brand	Model	Voltage range	Power	Type	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 15%	2-20	97% - 12%	2-20	98% - 16%	2-20	98% - 16%	
ABB	STD 50-3	230/50Hz	60-500	L	1-10	98% - 15%	2-10	97% - 1%	1-4	96% - 1%	1-4	96% - 1%	1-20	98% - 1%	2-9	98% - 1%	1-6	97% - 9%	1-6	97% - 9%	
Altenburger Electronic	50 30	230/50Hz	15-350	T	1-15	98% - 1%	1-10	97% - 5%	1-6	94% - 7%	1-6	94% - 7%	2-20	99% - 1%	2-12	97% - 13%	1-8	95% - 22%	1-8	95% - 22%	
ALPORA	DSP 400	230/50Hz	400	L	2-20	99% - 15%	2-20	98% - 17%	2-20	98% - 21%	2-20	98% - 21%	1-10	96% - 22%	1-10	97% - 26%	1-10	97% - 15%	1-9	97% - 15%	
Berker	2861	230/50Hz	50-420	U	1-10	98% - 34%	1-10	97% - 35%	1-5	97% - 1%	1-5	97% - 1%	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	
Blicino	L/NNT441N	230/50Hz			2-13	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%	1-11	98% - 1%	1-10	99% - 1%	1-5	99% - 7%	1-5	99% - 7%	
Blicino	L/NNT4408	230/50Hz			1-10	98% - 1%	1-10	98% - 1%	1-4	97% - 1%	1-4	97% - 1%	1-10	98% - 1%	1-10	98% - 7%	1-4	97% - 1%	1-4	97% - 1%	
Blicino	NT4402N	230/50Hz	500	R	2-20	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%	1-20	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%	
Busch-Jaeger	6513 U-102	230/50Hz	40-420	T	1-20	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%	1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%	
Busch-Jaeger	6523 U-102	230/50Hz	420	T																	
Busch-Jaeger	2250 U	230/50Hz	60-600	L																	
Busch-Jaeger	6526 U	230/50Hz																			
Busch-Jaeger	2247 U-500	230/50Hz																			
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	L																	
DINUY	RE EL1LE1	230/50Hz	400	LED																	
ELKO	400GLI	230/50Hz																			
ELKO	315GLE	230/50Hz	20-315	T																	
ELKO	600GLI	230/50Hz	40-600	U																	
ELKO	420GLEI	230/50Hz	40-420	U																	

Information about the OSRAM lamp type

Assessment of the results into categories. Includes the number of lamps and the related dimming range

DIMMER KOMPATIBILITÄT PAR16

BASISINFORMATIONEN:

1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.



220-240V **AC01770** 2700K
 13 W 50/60 Hz 27 mA
 Made in Germany XXX-XXXX

2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine sehr gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes dimmverhalten auftreten kann etc.











Liste der getesteten Dimmer

Legend					SUPERSTAR PAR16 35 36*				SUPERSTAR PAR16 50 36*				SUPERSTAR PAR16 60 36*				SUPERSTAR PAR16 80 120*			
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																				
Undesired dimmability																				
Not relevant																				
Not tested																				
EAN/Basic Code					405283330133/AC01184 405283330157/AC01192				405283330171/AC01187 405283330199/AC01194				405283330210/AB41305 405283330232/AB41306				405807503688/AC03049 405807503692/AC03051			
Dimmer					Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range	
Brand	Model	Voltage range	Power	Type	1-20	98%-15%	1-13	98%-20%	1-8	97%-23%	1-8	97%-23%	1-8	97%-23%	1-8	97%-23%	1-8	97%-23%	1-8	97%-23%
ABB	STD 50-3	230V50Hz	60-500	L	1-20	98%-15%	1-13	98%-20%	1-8	97%-23%	1-8	97%-23%	1-8	97%-23%	1-8	97%-23%	1-8	97%-23%	1-8	97%-23%
Altenburger Electronic	50 30	230V50Hz	15-350	T	2-20	98%-15%	2-20	97%-12%	2-20	98%-16%	2-20	98%-16%	2-20	98%-16%	2-20	98%-16%	2-20	98%-16%	2-20	98%-16%
AURORA	DSP 400	230V50Hz	400	L	1-10	98%-15%	2-10	97%-14%	1-4	96%-1%	1-4	96%-1%	1-4	96%-1%	1-4	96%-1%	1-4	96%-1%	1-4	96%-1%
Berker	2861	230V50Hz	50-420	U	1-20	98%-27%	1-20	98%-26%	1-20	97%-27%	1-20	97%-27%	1-20	97%-27%	1-20	97%-27%	1-20	97%-27%	1-20	97%-27%
Berker	LNINT441N	230V50Hz			1-15	98%-1%	1-10	97%-5%	1-6	94%-7%	1-6	94%-7%	1-6	94%-7%	1-6	94%-7%	1-6	94%-7%	1-6	94%-7%
Bicimo	LNINT4408	230V50Hz			2-20	98%-1%	2-9	98%-1%	1-6	97%-3%	1-6	97%-3%	1-6	97%-3%	1-6	97%-3%	1-6	97%-3%	1-6	97%-3%
Bicimo	NT4402N	230V50Hz	500	R	3-18	99%-19%	2-12	97%-19%	1-8	95%-22%	1-8	95%-22%	1-8	95%-22%	1-8	95%-22%	1-8	95%-22%	1-8	95%-22%
Busch-Jaeger	6513 U-102	230V50Hz	40-420	T	2-20	98%-15%	2-20	98%-17%	2-20	98%-21%	2-20	98%-21%	2-20	98%-21%	2-20	98%-21%	2-20	98%-21%	2-20	98%-21%
Busch-Jaeger	6523 U-102	230V50Hz	420	T	1-10	96%-22%	1-10	97%-26%	1-10	97%-26%	1-10	97%-26%	1-10	97%-26%	1-10	97%-26%	1-10	97%-26%	1-10	97%-26%
Busch-Jaeger	2250 U	230V50Hz	60-600	L	1-10	96%-22%	2-14	98%-16%	1-9	97%-15%	1-9	97%-15%	1-9	97%-15%	1-9	97%-15%	1-9	97%-15%	1-9	97%-15%
Busch-Jaeger	6526 U	230V50Hz			1-13	98%-34%	1-10	97%-35%	1-5	95%-1%	1-5	95%-1%	1-5	95%-1%	1-5	95%-1%	1-5	95%-1%	1-5	95%-1%
Busch-Jaeger	2247 U-500	230V50Hz			1-20	98%-15%	1-13	98%-20%	1-8	97%-23%	1-8	97%-23%	1-8	97%-23%	1-8	97%-23%	1-8	97%-23%	1-8	97%-23%
CENTURY CONTROL	MULTI DIMMER	230V50Hz	60-600	L	2-13	98%-1%	1-10	98%-5%	1-6	97%-9%	1-6	97%-9%	1-6	97%-9%	1-6	97%-9%	1-6	97%-9%	1-6	97%-9%
DINJY	RE EL1LE1	230V50Hz	400	LED	1-11	98%-1%	1-10	98%-1%	1-5	99%-7%	1-5	99%-7%	1-5	99%-7%	1-5	99%-7%	1-5	99%-7%	1-5	99%-7%
ELKO	400GLI	230V50Hz			1-10	98%-1%	1-10	97%-1%	1-4	97%-1%	1-4	97%-1%	1-4	97%-1%	1-4	97%-1%	1-4	97%-1%	1-4	97%-1%
ELKO	316GLE	230V50Hz	20-315	T	2-20	98%-6%	1-20	98%-7%	1-20	97%-10%	1-20	97%-10%	1-20	97%-10%	1-20	97%-10%	1-20	97%-10%	1-20	97%-10%
ELKO	600GLI	230V50Hz	40-600	U	1-20	98%-1%	1-13	97%-1%	1-8	96%-1%	1-8	96%-1%	1-8	96%-1%	1-8	96%-1%	1-8	96%-1%	1-8	96%-1%
ELKO	420GLEI	230V50Hz	40-420	U	1-14	98%-1%	1-13	97%-4%	1-10	97%-19%	1-10	97%-19%	1-10	97%-19%	1-10	97%-19%	1-10	97%-19%	1-10	97%-19%











Angaben zum OSRAM Lampentyp

Bewertung der Testergebnisse in Ampel Kategorien. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich











DIMMER KOMPATIBILITÄT PAR16

Legend						PARATHOM PRO PAR16 35 36°	PARATHOM PRO PAR16 50 36°	PARATHOM PRO PAR16 80 36°	PARATHOM DIM PAR16 35 36°	PARATHOM DIM PAR16 50 36°	PARATHOM DIM PAR16 50 36° E14	PARATHOM DIM PAR16 80 36°	PARATHOM DIM PAR16 80 60°	PARATHOM DIM PAR16 80 120°	PARATHOM DIM PAR16 100 36°										
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																									
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																									
Undesired dimmability																									
Not tested																									
						EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code											
						4058075260016 / AC16503 4058075259997 / AC16504 4058075259898 / AC16505	4058075095427 / AC08013 4058075095403 / AC08014 4058075095304 / AC08015	4058075260191 / AC16506 4058075260177 / AC16507 4058075260153 / AC16508	4058075259973 / AC16509 4058075259959 / AC16510 4058075259874 / AC16511	4058075260139 / AC16512 4058075260115 / AC16513 4058075260054 / AC16514	4058075264366 / AC17339	4058075095489 / AC07998 4058075095465 / AC07999 4058075095441 / AC08000	4058075095540 / AC08001 4058075095526 / AC08002 4058075095502 / AC08003	4058075095601 / AC08004 4058075095588 / AC08005 4058075095564 / AC08006	4058075096608 / AC08007 4058075096561 / AC08008 4058075096547 / AC08009										
Dimmer						Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Dimming range 1 Lamp	Dimming range 4 Lamps	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range		
Brand	Model	Voltage range	Power	Type																					
ABB	STD 50-3	230/50Hz	60-500	L		1-20	98-10%	1-3	100-32%			1-20	99-2%	1-18	97-1%	96-28%		1-2	90-27%	1-2	90-27%	1-2	90-27%	1-8	94-22%
Altenburger	50,3	230/50Hz						2-20	100-17%			1-3	99-0%	1-20	98-0%	95-34%	93-34%	1-20	90-16%	1-20	90-16%	1-20	90-16%		
AURORA	DSP 400	230/50Hz	400	L				1-3	100-0%	1-3	98-0%	1-11	99-0%	1-10	95-0%	68-0%	94-0%	1-20	90-26%	1-20	90-26%	1-20	90-26%	1-3	92-0%
Berker	2861	230/50Hz	50-420	U				1-20	100-34%	1-20	96-33%	1-10	99-0%	1-20	97-0%	92-32%	93-32%	1-20	91-30%	1-20	91-30%	1-20	91-30%	1-20	94-27%
Bticino	L/N/NT4411N	230/50Hz				1-20	100-0%	1-10	99-9%			1-9	100-0%	1-14	97-0%	98-17%	94-18%	1-10	80-9%	1-10	80-9%	1-10	80-9%	1-6	82-4%
Bticino	L/N/NT4408	230/50Hz				1-20	100-0%	1-12	100-0%			1-20	100-0%	1-20	98-0%			2-10	92-0%	2-10	92-0%	2-10	92-0%	1-9	95-0%
bticino	NT4402N	230/50Hz	500	R				1-12	98-27%							88-22%	97-23%	1-5	78-23%	1-5	78-23%	1-5	78-23%	1-6	80-16%
Busch-Jaeger	6513 U-102	230/50Hz	420	T		1-20	100-0%	2-20	100-24%	1-20	99-31%	1-20	100-0%	1-20	97-3%	100-40%	94-40%	1-20	92-22%	1-20	92-22%	1-20	92-22%	1-20	97-17%
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T		1-9	99-9%	1-10	100-37%	1	93-29%	1-4	100-9%	1-7	97-6%	91-29%	94-29%							1	87-25%
Busch-Jaeger	2250 U	230/50Hz	60-600	L				1-4	100-24%	1-6	100-15%					77-11%	93-11%	1-3	93-21%	1-3	93-21%	1-3	93-21%	1-9	95-13%
Busch-Jaeger	6526 U	230/50Hz				1-20	100-19%	1-8	100-37%	1-5	94-33%	1-20	99-20%	1-16	98-24%	89-0%	94-0%							1-6	88-26%
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U		1-4	99-0%	1-7	100-17%	1-6	94-10%	1-4	99-0%	1-9	97-0%	94-12%	93-12%	1-7	90-15%	1-7	90-15%	1-7	90-15%	1-6	94-7%
DINUY	RE EL1 LE1	230/50Hz	400	LED				1-7	100-4%	1-5	99-3%			1-14	96-0%	100-0%	94-0%	1-7	99-5%	1-7	99-5%	1-7	99-5%	1-5	99-2%
Domintell	DimMax 420 SL	230/50Hz	200	L/T		1-20	100-0%			1-12	98-8%	1-16	100-0%	1-13	97-0%	100-0%	93-0%								
ELKO	400GLI	230/50Hz						1-2	100-2%			1-11	100-0%	1-12	97-0%			1-2	86-2%	1-2	86-2%	1-2	86-2%	1-3	90-2%
ELKO	315GLE	230/50Hz	20-315	T		1-20	100-0%	1-20	100-30%			1-20	100-0%	1-20	98-0%	100-12%	94-12%	1-20	90-26%	1-20	90-26%	1-20	90-26%	1-20	95-22%
ELKO	600GLE/I	230/50Hz				1-20	99-0%	1-6	100-0%	1-8	95-20%	1-11	99-1%	1-13	98-5%	92-17%	94-18%	1-5	86-0%	1-5	86-0%	1-5	86-0%	1-10	90-0%
ELKO	600GLI	230/50Hz	40-600	U		1-20	99-0%	1-6	100-0%			1-20	99-0%	1-20	98-0%	88-15%	94-15%	1-5	88-26%	1-5	88-26%	1-5	88-26%	1-6	91-21%
ELKO	420GLE/I	230/50Hz	40-420	U		1-17	100-0%	1-9	100-7%	1-6	93-4%	1-17	100-0%	1-15	98-0%	89-7%	93-8%	1-8	85-7%	1-8	85-7%	1-8	85-7%	1-6	88-3%
ELKO	1000LRI	230/50Hz				1-20	99-0%	1-20	100-0%	1-15	100-0%	1-20	99-0%	1-20	96-0%	100-0%	93-0%	1-19	96-0%	1-19	96-0%	1-19	96-0%	1-16	98-0%
ELKO	630GLE	230/50Hz	20-630	U		1-20	100-1%	1-20	100-15%	1-20	98-26%	1-20	100-7%	1-20	98-1%	99-35%	93-35%	1-9	90-15%	1-9	90-15%	1-9	90-15%	1-20	95-11%
Eltako	EUD61NPN-UC	230/50Hz	5-400	R/L/C		1-14	100-0%	1-7	100-3%	1-6	92-6%	1-15	100-0%	1-14	97-0%	89-0%	94-0%	1-4	83-3%	1-4	83-3%	1-4	83-3%	1-6	87-1%
Feller	40200.LEDxxx	230/50Hz				1-20	100-1%	1-20	100-27%	1-20	98-25%	1-20	100-1%	1-20	98-1%	97-31%	94-31%	1-20	89-25%	1-20	89-25%	1-20	89-25%	1-20	94-21%
Feller	40600.RLC	230/50Hz	20-600	U		1-20	99-0%	1-6	100-0%	1-8	95-20%	1-11	99-1%	1-13	98-5%	92-17%	94-18%	1-5	86-0%	1-5	86-0%	1-5	86-0%	1-10	90-0%
Feller	40600.RC	230/50Hz				1-20	100-1%	1-20	100-15%	1-20	98-26%	1-20	100-7%	1-20	98-1%	99-35%	93-35%	1-9	90-15%	1-9	90-15%	1-9	90-15%	1-20	95-11%
Feller	40600.RL	230/50Hz				1-20	99-0%	1-6	100-0%			1-20	99-0%	1-20	98-0%	88-15%	94-15%	1-5	88-26%	1-5	88-26%	1-5	88-26%	1-6	91-21%
Feller	40420.RLC	230/50Hz				1-17	100-0%	1-9	100-7%	1-6	93-4%	1-17	100-0%	1-15	98-0%	89-7%	93-8%	1-8	85-7%	1-8	85-7%	1-8	85-7%	1-6	88-3%
Feller	31000	230/50Hz				1-20	99-0%	1-20	100-0%	1-15	100-0%	1-20	99-0%	1-20	96-0%	100-0%	93-0%	1-19	96-0%	1-19	96-0%	1-19	96-0%	1-16	98-0%
GIRA	226200	230/50Hz				1-20	100-0%	1	100-14%			1-20	100-0%	1-18	97-0%	84-15%	94-15%	1-2	92-13%	1-2	92-13%	1-2	92-13%	1-3	94-6%
Gira	030700	230/50Hz	20-525	T		1-20	100-0%	2-20	100-25%			1-20	100-0%	1-20	98-0%	100-33%	94-33%	1-20	88-23%	1-20	88-23%	1-20	88-23%	1-20	93-18%
Gira	117600	230/50Hz	50-420	U		1-20	100-0%	1-20	100-34%			1-16	100-7%			92-28%	94-28%	2-20	90-29%	2-20	90-29%	2-20	90-29%	1-20	93-28%

DIMMER KOMPATIBILITÄT PAR16

Legend					PARATHOM PRO PAR16 35 36*	PARATHOM PRO PAR16 50 36*	PARATHOM PRO PAR16 80 36*	PARATHOM DIM PAR16 35 36*	PARATHOM DIM PAR16 50 36*	PARATHOM DIM PAR16 50 36* E14	PARATHOM DIM PAR16 80 36*	PARATHOM DIM PAR16 80 60*	PARATHOM DIM PAR16 80 120*	PARATHOM DIM PAR16 100 36*										
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																								
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																								
Undesired dimmability																								
Not tested																								
					EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code										
					4058075260016 / AC16503 4058075259997 / AC16504 4058075259889 / AC16505	4058075095427 / AC08013 4058075095403 / AC08014 4058075095304 / AC08015	4058075260191 / AC16506 4058075260177 / AC16507 4058075260153 / AC16508	4058075259973 / AC16509 4058075259959 / AC16510 4058075259874 / AC16511	4058075260139 / AC16512 4058075260115 / AC16513 4058075260054 / AC16514	4058075264366 / AC17339	4058075095489 / AC07998 4058075095465 / AC07999 4058075095441 / AC08000	4058075095540 / AC08001 4058075095526 / AC08002 4058075095502 / AC08003	4058075095601 / AC08004 4058075095588 / AC08005 4058075095564 / AC08006	4058075096608 / AC08007 4058075096561 / AC08008 4058075096547 / AC08009										
Dimmer					Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range				
Brand	Model	Voltage range	Power	Type																				
Gira	238500	230/50Hz																						
Gira	217400	230/50Hz	4X20-250	KNX-U	1	98-39%	1-16	100-20%	1-15	99-19%	1	99-41%	1-15	96-36%	100-0%	94-0%	1-19	94-19%	1-19	94-19%	1-19	94-19%	1-17	98-12%
Hager	WUD87	230/50Hz	400	LED-U	1-20	100-0%	1-10	100-20%	1-20	94-22%	1-18	100-0%	1-16	98-0%	96-24%	93-25%	1-20	91-20%	1-20	91-20%	1-20	91-20%	1-20	84-15%
Hamilton	KP1X40	230/50Hz	400																					
Hugo Müller	paladin 872110 led	230/50Hz																						
Jung	225 NVDE	230/50Hz	20-500	L	1-20	100-0%	1	100-14%			1-20	100-0%	1-18	97-0%	84-15%	94-15%	1-2	92-13%	1-2	92-13%	1-2	92-13%	1-3	94-6%
Jung	225 TDE	230/50Hz			1-20	100-0%	2-20	100-25%			1-20	100-0%	1-20	98-0%	100-33%	94-33%	1-20	88-23%	1-20	88-23%	1-20	88-23%	1-20	93-18%
Jung	254 UDIE1	230/50Hz			1-20	100-0%	1-20	100-34%			1-16	100-7%			92-28%	94-28%	2-20	90-29%	2-20	90-29%	2-20	90-29%	1-20	93-28%
Jung	1224 LEDUDE	230/50Hz		LED											95-0%	94-0%	1-20	91-0%	1-20	91-0%	1-20	91-0%	1-20	95-8%
Jung	3904 REGHE	230/50Hz			1	98-39%	1-16	100-20%	1-15	99-19%	1	99-41%	1-15	96-36%	100-0%	94-0%	1-19	94-19%	1-19	94-19%	1-19	94-19%	1-17	98-12%
Legrand	665114	230/50Hz	400	U	1-20	100-0%	1-10	99-9%			1-9	100-0%	1-14	97-0%	98-17%	94-18%	1-10	80-9%	1-10	80-9%	1-10	80-9%	1-6	82-4%
Legrand	574319/574339	230/50Hz	400	U	1-20	100-0%	1-10	99-9%			1-9	100-0%	1-14	97-0%	98-17%	94-18%	1-10	80-9%	1-10	80-9%	1-10	80-9%	1-6	82-4%
Legrand	572239/572739	230/50Hz	400	U	1-20	100-0%	1-10	99-9%			1-9	100-0%	1-14	97-0%	98-17%	94-18%	1-10	80-9%	1-10	80-9%	1-10	80-9%	1-6	82-4%
Legrand	078407/079207	230/50Hz	400	U	1-20	100-0%	1-10	99-9%			1-9	100-0%	1-14	97-0%	98-17%	94-18%	1-10	80-9%	1-10	80-9%	1-10	80-9%	1-6	82-4%
Legrand	048869/048871	230/50Hz	400	U	1-20	100-0%	1-10	99-9%			1-9	100-0%	1-14	97-0%	98-17%	94-18%	1-10	80-9%	1-10	80-9%	1-10	80-9%	1-6	82-4%
Legrand	067083/048869	230/50Hz	400	U	1-20	100-0%	1-10	99-9%			1-9	100-0%	1-14	97-0%	98-17%	94-18%	1-10	80-9%	1-10	80-9%	1-10	80-9%	1-6	82-4%
Legrand	281084	230/50Hz	500	L	1	99-0%																		
Legrand	617030	230/50Hz	600	L																				
Legrand	770061	230/50Hz	400	RL			1-8	100-20%			1-14	100-0%	1-15	98-0%				91-18%	2-4	91-18%	2-4	91-18%		
Legrand	099314	230/50Hz	300	RL			1-6	100-0%			1-12	100-0%	1-11	98-0%										
Legrand	770062	230/50Hz	400	RLC			1-9	100-0%			1-16	100-0%	1-15	97-0%	84-0%	94-0%	1-20	91-0%	1-20	91-0%	1-20	91-0%		
Legrand	617031	230/50Hz	1000	L							1-20	100-3%	1-20	97-1%	91-0%	94-0%								
Legrand	078405	230/50Hz	600	RL	1-20	100-0%	1-12	100-0%			1-20	100-0%	1-20	98-0%			2-10	92-0%	2-10	92-0%	2-10	92-0%	1-9	95-0%
MASTER	DM-DGL	230/50Hz	1000	U/LED			1-14	100-2%									1	96-3%	1	96-3%	1	96-3%		
MASTER	DM-2500	230/50Hz	2500	U/LED	1-20	98-0%	1-20	100-2%	1-9	99-1%	1-20	99-0%	1-20	96-0%	100-7%	94-7%							1-20	99-1%
Merten	MEG5136-0000	230/50Hz			1-20	100-0%	1-20	100-30%			1-20	100-0%	1-20	98-0%	100-12%	94-12%	1-20	90-26%	1-20	90-26%	1-20	90-26%	1-20	95-22%
Merten	MEG5134-0000	230/50Hz			1-20	100-1%	1-20	100-27%	1-20	98-25%	1-20	100-1%	1-20	98-1%	97-31%	94-31%	1-20	89-25%	1-20	89-25%	1-20	89-25%	1-20	94-21%
Merten	MEG5139-0000	230/50Hz			1-20	99-0%	1-6	100-0%	1-8	95-20%	1-11	99-1%	1-13	98-5%	92-17%	94-18%	1-5	86-0%	1-5	86-0%	1-5	86-0%	1-10	90-0%
Merten	MEG5137-0000	230/50Hz			1-20	100-1%	1-20	100-15%	1-20	98-26%	1-20	100-7%	1-20	98-1%	99-35%	93-35%	1-9	90-15%	1-9	90-15%	1-9	90-15%	1-20	95-11%
Merten	MEG5133-0000	230/50Hz			1-20	99-0%	1-6	100-0%	1-20	99-0%	1-20	99-0%	1-20	98-0%	88-15%	94-15%	1-5	88-26%	1-5	88-26%	1-5	88-26%	1-6	91-21%
Merten	MEG5138-0000	230/50Hz			1-17	100-0%	1-9	100-7%	1-6	93-4%	1-17	100-0%	1-15	98-0%	89-7%	93-8%	1-8	85-7%	1-8	85-7%	1-8	85-7%	1-6	88-3%
Merten	MEG 5170-0300	230/50Hz	10-200	U	1-2	100-1%					1-3	100-0%	1-15	98-0%										
Merten	MEG 5131	230/50Hz	40-400	L	1-16	100-0%	1-6	100-0%			1-16	99-0%	1-15	98-0%	89-5%	93-5%	1-6	87-0%	1-6	87-0%	1-6	87-0%	1-6	90-0%
Merten	MEG 5132	230/50Hz			1-16	100-0%	1-6	100-0%			1-16	99-0%	1-15	98-0%	89-5%	93-5%	1-6	87-0%	1-6	87-0%	1-6	87-0%	1-6	90-0%

DIMMER KOMPATIBILITÄT PAR16

Legend					PARATHOM PRO PAR16 35 36*	PARATHOM PRO PAR16 50 36*	PARATHOM PRO PAR16 80 36*	PARATHOM DIM PAR16 35 36*	PARATHOM DIM PAR16 50 36*	PARATHOM DIM PAR16 50 36* E14	PARATHOM DIM PAR16 80 36*	PARATHOM DIM PAR16 80 60*	PARATHOM DIM PAR16 80 120*	PARATHOM DIM PAR16 100 36*										
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																								
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																								
Undesired dimmability																								
Not tested																								
					EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code											
					4058075260016 / AC 16503 4058075259997 / AC 16504 4058075259889 / AC 16505	4058075095427 / AC08013 4058075095403 / AC08014 4058075095304 / AC08015	4058075260191 / AC 16506 4058075260177 / AC 16507 4058075260153 / AC 16508	4058075259973 / AC 16509 4058075259959 / AC 16510 4058075259874 / AC 16511	4058075260139 / AC 16512 4058075260115 / AC 16513 4058075260054 / AC 16514	4058075264366 / AC17339	4058075095489 / AC07998 4058075095465 / AC07999 4058075095441 / AC08000	4058075095540 / AC08001 4058075095526 / AC08002 4058075095502 / AC08003	4058075095601 / AC08004 4058075095588 / AC08005 4058075095564 / AC08006	4058075095608 / AC08007 4058075095611 / AC08008 4058075095647 / AC08009										
Dimmer					Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range				
Brand	Model	Voltage range	Power	Type																				
Merten	MEG 5140	230/50Hz	9-100	L	1-3	100-0%	1	100-0%	1	91-0%	1-3	99-0%	1-3	98-0%	86-8%	93-8%	1	83-0%	1	83-0%	1	83-0%	1-2	85-1%
Merten	MEG 5135	230/50Hz	60-1000	L	1-20	99-0%	1-20	100-0%	1-15	100-0%	1-20	99-0%	1-20	96-0%	100-0%	93-0%	1-19	96-0%	1-19	96-0%	1-19	96-0%	1-16	98-0%
MK	K4501	230/50Hz	180	L	1-2	99-0%	1-2	100-14%			1-4	99-0%	1-5	97-0%	86-17%	93-18%						1-2	85-11%	
NEXUS	881P-01	230/50Hz	400	L	1-7	100-0%	1-3	100-0%			1-11	100-0%	1-11	97-0%	79-6%							1-4	97-0%	
NIKO	310-01900	230/50Hz	5-200	U	1-5	99-0%	1-15	100-2%	1-3	100-5%	1-6	99-0%	1-7	96-0%	100-11%	94-11%	1-14	97-12%	1-14	97-12%	1-14	97-12%	1-14	99-1%
NIKO	330-00700	230/50Hz	5-200	U	1-6	99-0%	1-5	100-14%	1-2	100-1%	1-5	99-0%	1-7	96-0%	100-0%	94-0%	1-3	98-12%	1-3	98-12%	1-3	98-12%	1-3	99-8%
Odace	S520512	230/50Hz			1-20	100-1%	1-20	100-27%	1-20	98-25%	1-20	100-1%	1-20	98-1%	97-31%	94-31%	1-20	89-25%	1-20	89-25%	1-20	89-25%	1-20	94-21%
Odace	S520511	230/50Hz			1-20	99-0%	1-6	100-0%			1-20	99-0%	1-20	98-0%	88-15%	94-15%	1-5	88-26%	1-5	88-26%	1-5	88-26%	1-6	91-21%
Odace	S520515	230/50Hz			1-17	100-0%	1-9	100-7%	1-6	93-4%	1-17	100-0%	1-15	98-0%	89-7%	93-8%	1-8	85-7%	1-8	85-7%	1-8	85-7%	1-6	88-3%
Odace	S520518	230/50Hz			1-3	100-0%	1	100-0%	1	91-0%	1-3	99-0%	1-3	98-0%	86-8%	93-8%	1	83-0%	1	83-0%	1	83-0%	1-2	85-1%
Osram	HTI DALI 315 DIM	230/50Hz	20-315	DALI-T	1-20	100-0%	1-20	100-22%	1-18	100-16%	1-2	100-0%	1-20	98-0%	100-19%	94-20%	1-15	97-19%	1-15	97-19%	1-15	97-19%	1-20	99-14%
PEHA	435 HAN	230/50Hz	60-600	L			1	100-32%			1-20	100-2%	1-20	98-0%			2	84-13%	2	84-13%	2	84-13%	1-9	87-17%
Schneider	400GLI	230/50Hz	40-400	T			1-2	100-2%			1-11	100-0%	1-12	97-0%			1-2	86-2%	1-2	86-2%	1-2	86-2%	1-3	90-2%
Schneider	SBD315RC	230/50Hz			1-20	100-0%	1-20	100-30%			1-20	100-0%	1-20	98-0%	100-12%	94-12%	1-20	90-26%	1-20	90-26%	1-20	90-26%	1-20	95-22%
Schneider	SBD200LED	230/50Hz	400		1-20	100-1%	1-20	100-27%	1-20	98-25%	1-20	100-1%	1-20	98-1%	97-31%	94-31%	1-20	89-25%	1-20	89-25%	1-20	89-25%	1-20	94-21%
Schneider	SBD600RCRL	230/50Hz			1-20	99-0%	1-6	100-0%	1-8	95-20%	1-11	99-1%	1-13	98-5%	92-17%	94-18%	1-5	86-0%	1-5	86-0%	1-5	86-0%	1-10	90-0%
Schneider	SBD630RC	230/50Hz			1-20	100-1%	1-20	100-15%	1-20	98-26%	1-20	100-7%	1-20	98-1%	99-35%	93-35%	1-9	90-15%	1-9	90-15%	1-9	90-15%	1-20	95-11%
Schneider	SBD600RL	230/50Hz			1-20	99-0%	1-6	100-0%			1-20	99-0%	1-20	98-0%	88-15%	94-15%	1-5	88-26%	1-5	88-26%	1-5	88-26%	1-6	91-21%
Schneider	SBD420RCRL	230/50Hz			1-17	100-0%	1-9	100-7%	1-6	93-4%	1-17	100-0%	1-15	98-0%	89-7%	93-8%	1-8	85-7%	1-8	85-7%	1-8	85-7%	1-6	88-3%
Schneider	5170	230/50Hz			1-2	100-1%					1-3	100-0%	1-15	98-0%										
Schneider	SBD400RL	230/50Hz			1-16	100-0%	1-6	100-0%			1-16	99-0%	1-15	98-0%	89-5%	93-5%	1-6	87-0%	1-6	87-0%	1-6	87-0%	1-6	90-0%
Schneider	SBD5PL	230/50Hz			1-3	100-0%	1	100-0%	1	91-0%	1-3	99-0%	1-3	98-0%	86-8%	93-8%	1	83-0%	1	83-0%	1	83-0%	1-2	85-1%
Schneider	ATTD1000RL	230/50Hz			1-20	99-0%	1-20	100-0%	1-15	100-0%	1-20	99-0%	1-20	96-0%	100-0%	93-0%	1-19	96-0%	1-19	96-0%	1-19	96-0%	1-16	98-0%
Shuttle	SDIM-T-LED-500W	230/50Hz	2-500	T & LED-T	1-20	100-0%	1-20	100-16%	1-20	100-14%	1-20	100-0%	1-20	98-0%	100-10%	93-10%	1-20	93-15%	1-20	93-15%	1-20	93-15%	1-20	97-11%
Siemens	STC8 284	230/50Hz	20-525	T	1-20	100-1%	2-20	100-13%			1-20	100-3%	1-2	98-2%	100-39%	94-39%	3-20	87-13%	3-20	87-13%	3-20	87-13%	1-20	90-8%
Siemens	SWG1-528-1AB31	230/50Hz	20-500	KNX-U	1-20	98-0%	1-20	100-0%	1-9	99-2%	1-20	99-0%	1-20	96-0%	99-0%	94-0%	1-20	92-0%	1-20	92-0%	1-20	92-0%	1-20	93-0%
VADSBO	LD 220	230/50Hz	1-200	U	1-18	100-0%			1-10	100-2%	1-16	100-0%	1-14	98-0%	100-12%	93-12%	1-15	99-3%	1-15	99-3%	1-15	99-3%	1-13	99-2%
VARILIGHT	HQ3W	230/50Hz	400		1-20	100-0%	1-10	100-34%	1-20	100-9%	1-20	100-0%	1-20	97-0%	97-12%	94-12%	1-8	79-28%	1-8	79-28%	1-8	79-28%	1-6	82-23%
VARILIGHT	JQP401W	230/50Hz	400	T			1	95-5%							80-10%	93-10%	1-2	92-15%	1-2	92-15%	1-2	92-15%	1-3	94-8%
Vimar	20135	230/50Hz	3-100	U	1-8	100-0%	1-8	100-11%	1-6	100-8%	1-8	100-0%	1-7	98-0%	96-0%	94-0%	1-7	90-11%	1-7	90-11%	1-7	90-11%	1-7	95-8%
ZANO	WH401	230/50Hz	400	L	1-5	98-0%	1-6	100-0%	1-4	100-0%	1-11	100-0%	1-11	97-0%	79-0%	93-0%	1-2	92-0%	1-2	92-0%	1-2	92-0%	1-3	95-0%
ZANO	WH251	230/50Hz	250				1-3	100-0%	1-2	100-0%					77-0%	94-0%	1-3	92-0%	1-3	92-0%	1-3	92-0%	1-3	94-0%
ZANO	Z GRID 700	230/50Hz	250	LED			1-20	98-0%	1-17	93-0%			1-18	56-0%			1-19	84-0%	1-19	84-0%	1-19	84-0%		
ZANO	Z GRID 500	230/50Hz	500				1-4	100-0%					1-13	97-0%	79-7%	94-7%	1-3	92-0%	1-3	92-0%	1-3	92-0%	1-4	95-0%

Please Note:

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. OSRAM does not take over any responsibility, warranty or liability that this results can also achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonics or electronic resonance).
- Subject to change without notice
- Errors and omission excepted
- Always make sure to use the most recent release

Application Notes:

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

Bitte beachten:

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. OSRAM übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

Anwendungshinweis:

- Um bestmögliche Dimmergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.

LEDVANCE GmbH

Head Office:

Parkring 29-33
85748 Garching, Germany
Phone +49 89 780673-100
Fax +49 89 780673-XXX
www.ledvance.com