


PRODUCT DATASHEET

ST CLAS A 60 7 W/2700K E27

LED Retrofit Step DIM with remote control | LED lamps with four-step dimming

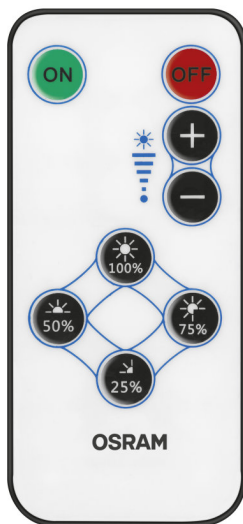

AREAS OF APPLICATION

- Wherever dimming was originally not planned
- Residential interiors

PRODUCT BENEFITS

- Individual control
- No app or smartphone required to control the lamp
- Comfortable and intuitive infrared remote control

PRODUCT FEATURES

- Lifetime: up to 15,000 h
- Dimmable in four steps: 100 %, 75 %, 50 % and 25 %
- Adjustable of dimming levels via remote control



TECHNICAL DATA


Electrical data

Rated wattage	7.00 W
Nominal wattage	7.00 W
Nominal voltage	220...240 V
Max. lamp no. on circuit break. 10 A (B)	50
Max. lamp no. on circuit break. 16 A (B)	80
Operating frequency	50...60 Hz

Photometrical data

Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Luminous flux	806 lm
Color rendering index Ra	80
Nominal luminous flux	806 lm
Rated color temperature	2700 K

Dimensions & weight



Overall length	105.0 mm
-----------------------	----------

Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	58 °C

Lifespan

Nominal lamp life time	15000 h
Rated lamp life time	15000 h
Number of switching cycles	100000

Additional product data

Base (standard designation)	E27
Mercury-free	Yes
Product remark	All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

Capabilities

Dimmable	Yes
-----------------	-----

Certificates & standards

Energy efficiency class	A+
--------------------------------	----

Country-specific categorizations

Order reference	LEDSCLA60REM 7W
------------------------	-----------------

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075269644	Folding carton box 1	60 mm x 86 mm x 142 mm	62.00 g	0.73 dm ³
4058075269651	Shipping carton box 4	416 mm x 153 mm x 201 mm	575.00 g	12.79 dm ³
4058075446809	Shipping carton box 32	- x - x -		

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.