

C10449057
G11076054
17.05.19



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com



DAMPPROOF LED 5x THROUGHWIRING



	EAN	l x w x h [mm]	W	V _{AC}	Hz	lm	lm/W	K
DP LED 1200 39W/4000K 5TH IP65	4058075319240	1200 x 95 x 78	39	220-240 V	50/60 Hz	4400	115	4000
DP LED 1500 55W/4000K 5TH IP65	4058075319325	1500 x 95 x 78	55	220-240 V	50/60 Hz	6400	115	4000


	EAN	IP	IK	∠	R _a	° (°C)	PF	👤
DP LED 1200 39W/4000K 5TH IP65	4058075319240	65	08	105°	> 80	-30...+40	> 0.9	1.9kg
DP LED 1500 55W/4000K 5TH IP65	4058075319325	65	08	105°	> 80	-30...+40	> 0.9	2.5kg

DAMPPROOF LED 5x THROUGHWIRING

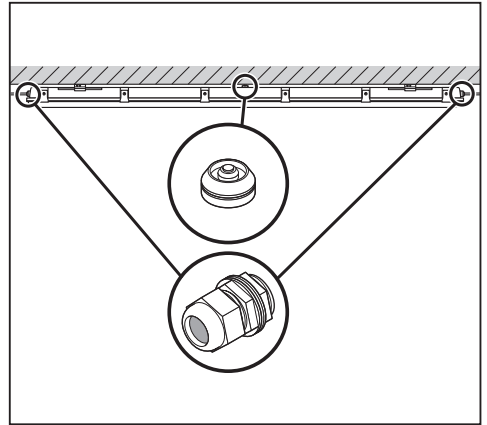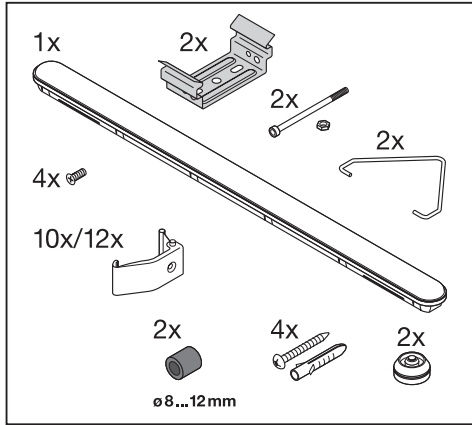

1x DAMPPROOF LED 5TH
 2x DAMPPROOF LED 5TH
 3x DAMPPROOF LED 5TH
 ...
 nx DAMPPROOF LED 5TH

	n	B16	C10	C16
	DAMPPROOF 1200	48	40	64
	DAMPPROOF 1500	25	25	40

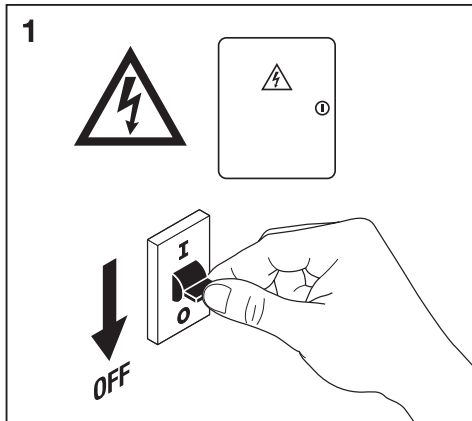

2

[mm]	X	Y
DAMPPROOF 1200	40±2	820±100
DAMPPROOF 1500	40±2	1120±100

