







SMART⁺ WIFI CASCADE



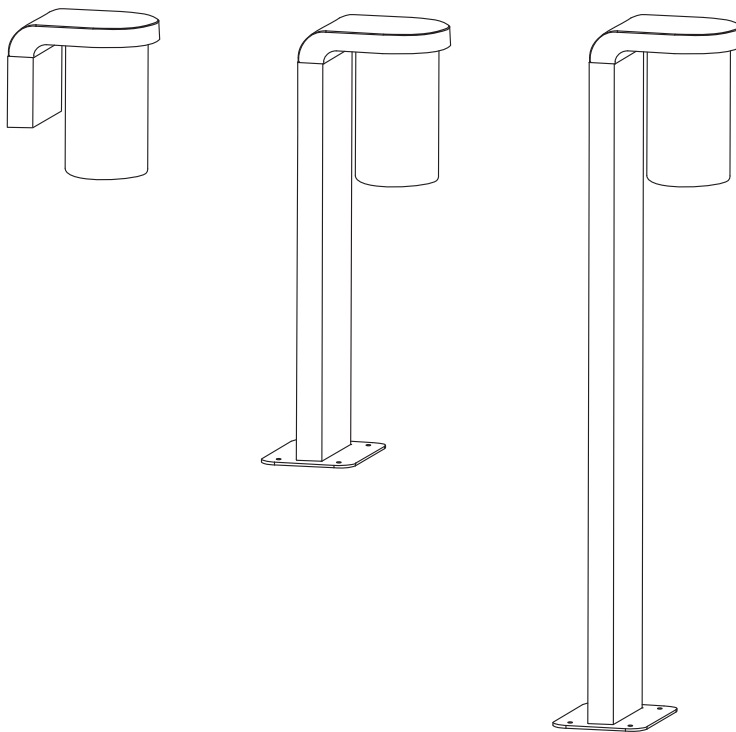




	EAN	W	lm	K	ΔT (°C)	V~	mA	Hz	PF
SMART OUTD WIFI CASCADEWALL RGBW DG	4058075564244	10	420	3000	-20...+40	220-240	43	50/60	>0.5
SMART OUTD WIFI CASCADE50CM RGBW DG	4058075564268	10	420	3000	-20...+40	220-240	43	50/60	>0.5
SMART OUTD WIFI CASCADE80CM RGBW DG	4058075564282	10	420	3000	-20...+40	220-240	43	50/60	>0.5

 **1127 g**
4058075564244


 **1594 g**
4058075564268

 **1921 g**
4058075564282

 1x



 3x  3x  4x  4x

mm

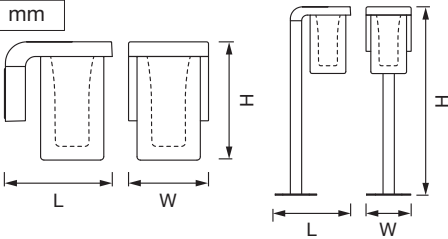

	L	W	H
CASCADE WALL	160	120	180
CASCADE 50CM POST	200	160	500
CASCADE 80CM POST	200	160	800


1


ON ON ON ON
OFF OFF ON ON

↑ ON
↓ OFF



2



(b)





(a)






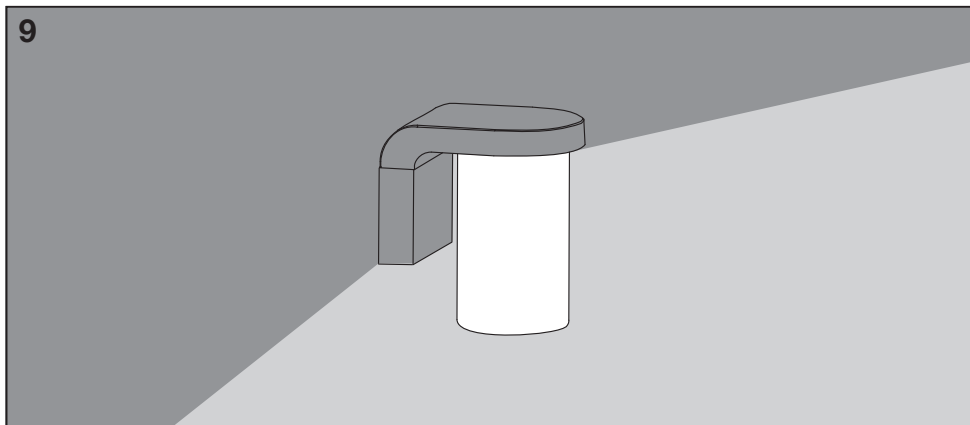
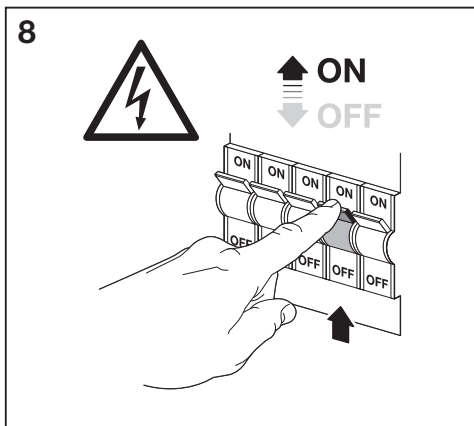
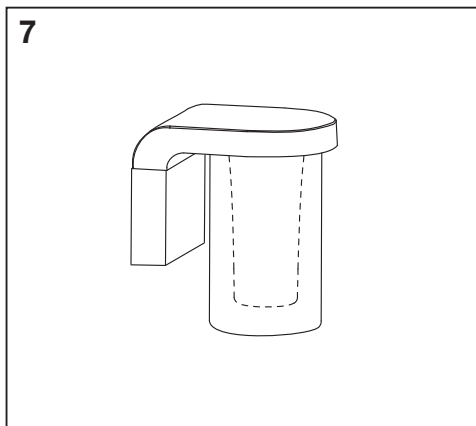
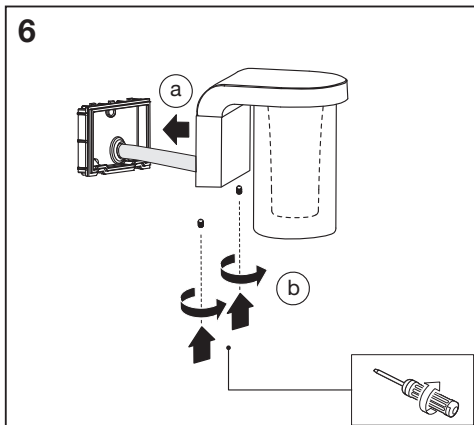
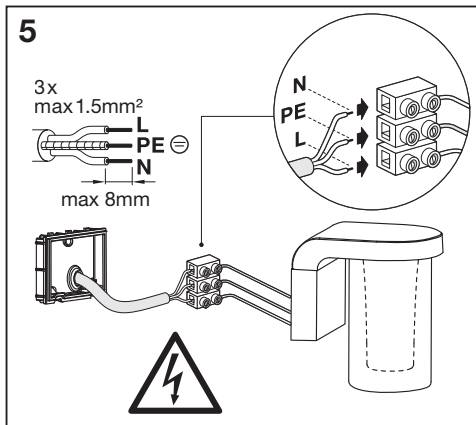
3




∅ 6mm





4



	EAN	This product contains a light source of energy efficiency class	Contained Light Source
SMART OUTD WIFI CASCADEWALL RGBW DG	4058075564244	F	
SMART OUTD WIFI CASCADE50CM RGBW DG	4058075564268	F	
SMART OUTD WIFI CASCADE80CM RGBW DG	4058075564282	F	



IP44

C10449057
G11111520
30.04.2021



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com