










SMART⁺ WIFI FLOOD

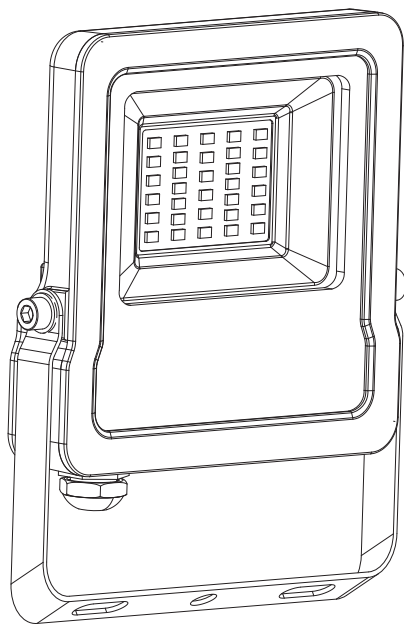



	EAN	W	lm	K		 (°C)	V~	mA	Hz		PF
SMART OUTD WIFI FLOOD 10W RGBW DG	4058075474604	10	700	3000	0.012769	-20...+40	220-240	45	50/60	100	>0.9
SMART OUTD WIFI FLOOD 20W RGBW DG	4058075474628	20	1400	3000	0.012769	-20...+40	220-240	90	50/60	100	>0.9
SMART OUTD WIFI FLOOD 30W RGBW DG	4058075474642	30	2190	3000	0.024948	-20...+40	220-240	140	50/60	100	>0.9
SMART OUTD WIFI FLOOD 50W DIM DG	4058075474666	50	4250	3000	0.035532	-20...+40	220-240	220	50/60	100	>0.9




 **380 g**
4058075474604

 **380 g**
4058075474628



 **650 g**
4058075474642

 **1000 g**
4058075474666



	W	H	L
10W	125	28	152
20W	125	28	152
30W	168	30	209
50W	200	36	237

1





ON
ON
ON
ON

OFF
OFF
OFF
OFF


ON
OFF

2

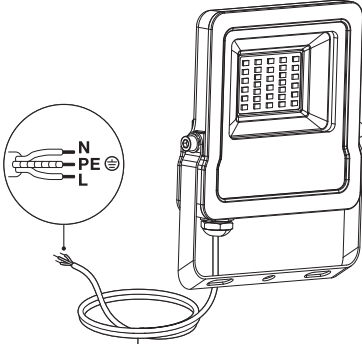


500mm (10W-50W)

3




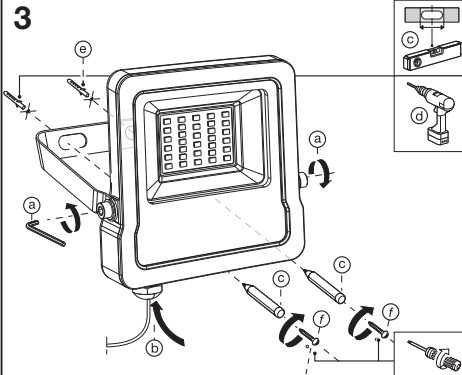




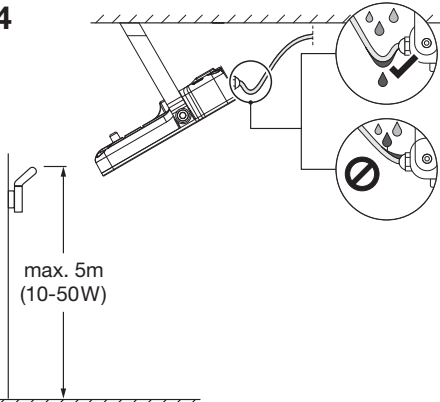

Max.:2.5N.m


4

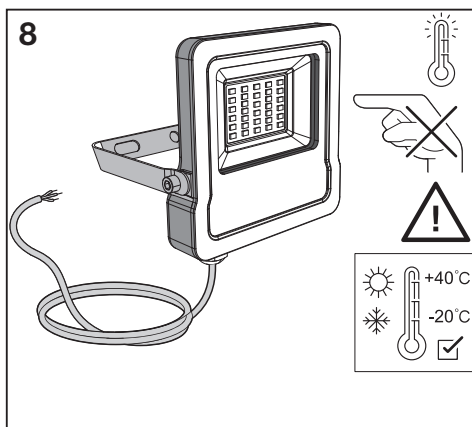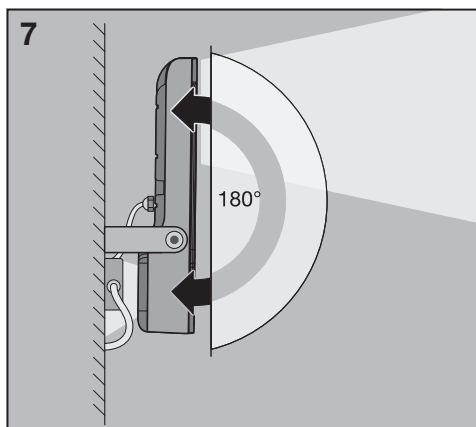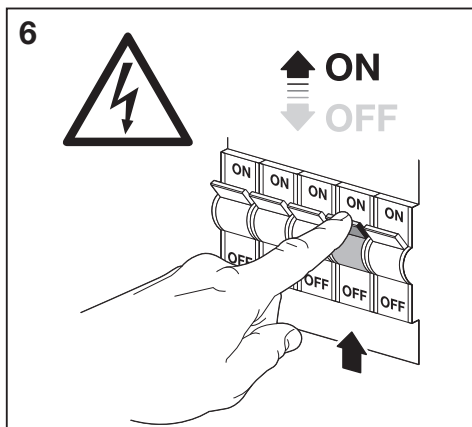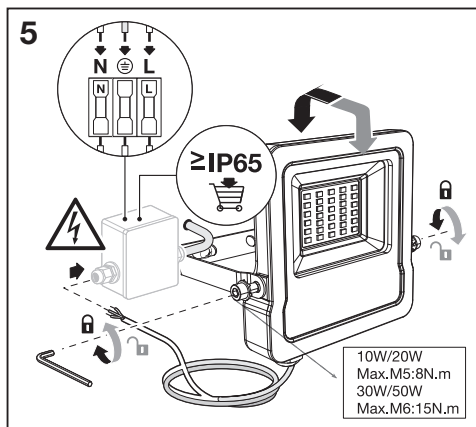

max. 5m
(10-50W)



	EAN	This product contains a light source of energy efficiency class	Contained Light Source
SMART OUTD WIFI FLOOD 10W RGBW DG	4058075474604	F	
SMART OUTD WIFI FLOOD 20W RGBW DG	4058075474628	F	
SMART OUTD WIFI FLOOD 30W RGBW DG	4058075474642	F	
SMART OUTD WIFI FLOOD 50W DIM DG	4058075474666	F	



C10449057
G11121906
30.07.2021



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com