

PRODUCT DATASHEET

LEDinestra 25 200° 3.5 W/2700K S14s

LEDinestra | Tubular LED lamps



AREAS OF APPLICATION

- Ideal for mirror lighting
- Hotels, restaurants
- Domestic applications
- Outdoor applications only in suitable luminaires

PRODUCT BENEFITS

- Long lifetime of up to 15,000 h
- Low energy consumption
- Good color rendering

PRODUCT FEATURES

- LED alternative to tubular incandescent lamps
- Uniform illumination
- Mercury-free lamps
- Bulb made from glass



TECHNICAL DATA


Electrical data

Rated wattage	3.50 W
Nominal wattage	3.50 W
Nominal voltage	220...240 V
Max. lamp no. on circuit break. 10 A (B)	600
Max. lamp no. on circuit break. 16 A (B)	1000
Operating frequency	50...60 Hz
Inrush current	0.6 A
Claimed equiv. conventional lamp power	25 W

Photometrical data

Rated color temperature	2700 K
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Luminous flux	260 lm
Color rendering index Ra	>80
Nominal luminous flux	260 lm

— Dimensions & weight



Overall length	300.0 mm
----------------	----------

Temperatures & operating conditions

Maximum temperature at tc test point	50 °C
--------------------------------------	-------

Lifespan

Nominal lamp life time	15000 h
Rated lamp life time	15000 h

Number of switching cycles	100000
-----------------------------------	--------

Additional product data

Base (standard designation)	S14s
Mercury-free	Yes

Capabilities

Dimmable	No
-----------------	----


Certificates & standards

Energy efficiency class	A+
--------------------------------	----

Country-specific categorizations

ILCOS	DRL/F-3,5/827-230-S14S-29/300
Order reference	LEDINESTRA25 3,

Light Distribution

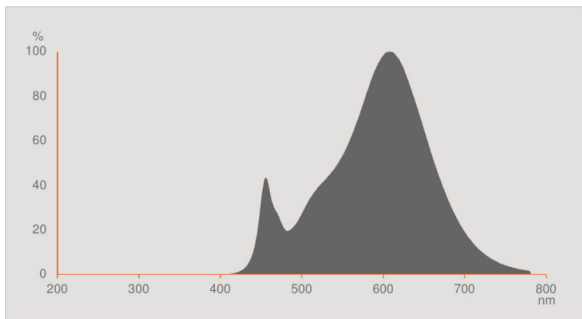

Spectral power distribution

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075817739	Folding carton box 1	33 mm x 50 mm x 307 mm	110.00 g	0.51 dm ³

4058075817746	Shipping carton box 10	370 mm x 215 mm x 155 mm	1055.00 g	12.33 dm ³
---------------	---------------------------	--------------------------	-----------	-----------------------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.